




Cable Glands

Plastic Cable Glands

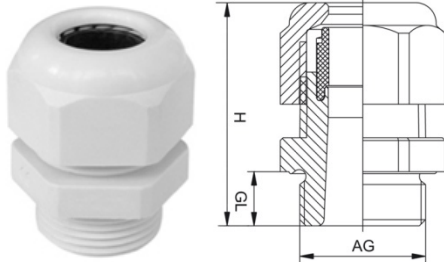

Material

■ Nylon PA

Features

- Thread: M / M-L / PG / PG-L / G / NPT
- Seal: NBR (IP68 with O-Ring)
- Temperature:
 - Static State: -40°C~100°C(-40°F~212°F)
 - Dynamic State: -20°C~80°C(-4°F~176°F)
- Color: Black & Grey

*H: Thin Cable D: Thick Cable

HSK-M (Metric Thread)

Part No.	Item Black	Item Grey	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C010101	HSK-M12B	HSK-M12G	M12x1.5	3-6.5	12.0	8.0	28.0
C010102	HSK-M16B-H	HSK-M16G-H	M16x1.5	2.5-6	16.0	8.0	30.0
C010103	HSK-M16B	HSK-M16G	M16x1.5	4-8	16.0	8.0	30.0
C010104	HSK-M16B-D	HSK-M16G-D	M16x1.5	5-10	16.0	8.0	32.0
C010105	HSK-M18B	HSK-M18G	M18x1.5	5-10	18.0	8.0	32.0
C010106	HSK-M20B-H	HSK-M20G-H	M20x1.5	5-9	20.0	9.0	35.0
C010107	HSK-M20B	HSK-M20G	M20x1.5	6-12	20.0	9.0	35.0
C010108	HSK-M20B-D	HSK-M20G-D	M20x1.5	8-14	20.0	9.0	38.0
C010109	HSK-M22B-H	HSK-M22G-H	M22x1.5	6-12	22.0	10.0	38.0
C010110	HSK-M22B	HSK-M22G	M22x1.5	8-14	22.0	10.0	38.0
C010111	HSK-M24B-H	HSK-M24G-H	M24x1.5	6-12	24.0	10.0	38.0
C010112	HSK-M24B	HSK-M24G	M24x1.5	8-14	24.0	10.0	38.0
C010113	HSK-M25B-H	HSK-M25G-H	M25x1.5	11-16	25.0	11.0	42.0
C010114	HSK-M25B	HSK-M25G	M25x1.5	13-18	25.0	11.0	42.0
C010115	HSK-M27B-H	HSK-M27G-H	M27x2.0	11-16	27.0	11.0	42.0
C010116	HSK-M27B	HSK-M27G	M27x2.0	13-18	27.0	11.0	42.0
C010117	HSK-M30B-H	HSK-M30G-H	M30x2.0	11-16	30.0	11.0	42.0
C010118	HSK-M30B	HSK-M30G	M30x2.0	13-18	30.0	11.0	42.0
C010119	HSK-M32B-H	HSK-M32G-H	M32x1.5	14-21	32.0	11.0	50.0
C010120	HSK-M32B	HSK-M32G	M32x1.5	18-25	32.0	11.0	50.0
C010121	HSK-M33B	HSK-M33G	M33x2.0	18-25	33.0	11.0	50.0
C010122	HSK-M36B-H	HSK-M36G-H	M36x2.0	14-21	36.0	11.0	50.0
C010123	HSK-M36B	HSK-M36G	M36x2.0	18-25	36.0	11.0	50.0
C010124	HSK-M40B	HSK-M40G	M40x1.5	22-32	40.0	13.0	61.0
C010125	HSK-M42B	HSK-M42G	M42x2.0	22-32	42.0	13.0	61.0
C010126	HSK-M48B	HSK-M48G	M48x2.0	22-32	48.0	13.0	61.0
C010127	HSK-M50B	HSK-M50G	M50x1.5	30-38	50.0	15.0	62.0
C010128	HSK-M50B-D	HSK-M50G-D	M50x1.5	31-41	50.0	15.0	62.0
C010129	HSK-M56B	HSK-M56G	M56x2.0	30-38	56.0	15.0	62.0
C010130	HSK-M60B	HSK-M60G	M60x1.5	37-44	60.0	15.0	62.0
C010131	HSK-M63B	HSK-M63G	M63x1.5	37-44	63.0	15.0	62.0
C010132	HSK-M64B	HSK-M64G	M64x2.0	37-44	64.0	15.0	62.0

Plastic Cable Glands

HSK-M-L (Metric with Lengthened Thread)

Part No.	Item Black	Item Grey	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C010201	HSK-M12B-L	HSK-M12G-L	M12x1.5	3-6.5	12.0	15.0	35.0
C010202	HSK-M16B-HL	HSK-M16G-HL	M16x1.5	2.5-6	16.0	15.0	37.0
C010203	HSK-M16B-L	HSK-M16G-L	M16x1.5	4-8	16.0	15.0	37.0
C010204	HSK-M16B-DL	HSK-M16G-DL	M16x1.5	5-10	16.0	15.0	40.0
C010205	HSK-M18B-L	HSK-M18G-L	M18x1.5	5-10	18.0	15.0	40.0
C010206	HSK-M20B-HL	HSK-M20G-HL	M20x1.5	5-9	20.0	15.0	42.0
C010207	HSK-M20B-L	HSK-M20G-L	M20x1.5	6-12	20.0	15.0	42.0
C010208	HSK-M20B-DL	HSK-M20G-DL	M20x1.5	8-14	20.0	15.0	44.0
C010209	HSK-M22B-HL	HSK-M22G-HL	M22x1.5	6-12	22.0	15.0	44.0
C010210	HSK-M22B-L	HSK-M22G-L	M22x1.5	8-14	22.0	15.0	44.0
C010211	HSK-M24B-HL	HSK-M24G-HL	M24x1.5	6-12	24.0	15.0	44.0
C010212	HSK-M24B-L	HSK-M24G-L	M24x1.5	8-14	24.0	15.0	44.0
C010213	HSK-M25B-HL	HSK-M25G-HL	M25x1.5	11-16	25.0	15.0	47.0
C010214	HSK-M25B-L	HSK-M25G-L	M25x1.5	13-18	25.0	15.0	47.0
C010215	HSK-M32B-HL	HSK-M32G-HL	M32x1.5	14-21	32.0	15.0	54.0
C010216	HSK-M32B-L	HSK-M32G-L	M32x1.5	18-25	32.0	15.0	54.0

HSK-PG (PG Thread)

Part No.	Item Black	Item Grey	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C010301	HSK-PG7B	HSK-PG7G	PG7	3-6.5	12.5	8.0	28.0
C010302	HSK-PG9B-H	HSK-PG9G-H	PG9	2.5-6	15.2	8.0	30.0
C010303	HSK-PG9B	HSK-PG9G	PG9	4-8	15.2	8.0	30.0
C010304	HSK-PG11B	HSK-PG11G	PG11	5-10	18.6	8.0	32.0
C010305	HSK-PG13.5B-H	HSK-PG13.5G-H	PG13.5	5-10	20.4	9.0	36.0
C010306	HSK-PG13.5B	HSK-PG13.5G	PG13.5	6-12	20.4	9.0	36.0
C010307	HSK-PG16B-H	HSK-PG16G-H	PG16	6-12	22.5	10.0	38.0
C010308	HSK-PG16B	HSK-PG16G	PG16	8-14	22.5	10.0	38.0
C010309	HSK-PG21B-H	HSK-PG21G-H	PG21	11-16	28.3	11.0	42.0
C010310	HSK-PG21B	HSK-PG21G	PG21	13-18	28.3	11.0	42.0
C010311	HSK-PG29B-H	HSK-PG29G-H	PG29	14-21	37.0	11.0	50.0
C010312	HSK-PG29B	HSK-PG29G	PG29	18-25	37.0	11.0	50.0
C010313	HSK-PG36B	HSK-PG36G	PG36	22-32	47.0	13.0	62.0
C010314	HSK-PG42B	HSK-PG42G	PG36	30-38	54.0	15.0	63.0
C010315	HSK-PG48B	HSK-PG48G	PG48	37-44	59.3	15.0	63.0

Plastic Cable Glands

HSK-PG-L (PG with Lengthened Thread)

Part No.	Item Black	Item Grey	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C010401	HSK-PG7B-L	HSK-PG7G-L	PG7	3-6.5	12.50	15.00	35.00
C010402	HSK-PG9B-HL	HSK-PG9G-HL	PG9	2.5-6	15.20	15.00	37.00
C010403	HSK-PG9B-L	HSK-PG9G-L	PG9	4-8	15.20	15.00	37.00
C010404	HSK-PG11B-L	HSK-PG11G-L	PG11	5-10	18.60	15.00	40.00
C010405	HSK-PG13.5B-HL	HSK-PG13.5G-HL	PG13.5	5-10	20.40	15.00	42.00
C010406	HSK-PG13.5B-L	HSK-PG13.5G-L	PG13.5	6-12	20.40	15.00	42.00
C010407	HSK-PG16B-HL	HSK-PG16G-HL	PG16	6-12	22.50	15.00	43.00
C010408	HSK-PG16B-L	HSK-PG16G-L	PG16	8-14	22.50	15.00	43.00
C010409	HSK-PG21B-H-L	HSK-PG21G-HL	PG21	11-16	28.30	15.00	47.00
C010410	HSK-PG21B-L	HSK-PG21G-L	PG21	13-18	28.30	15.00	47.00
C010411	HSK-PG29B-H-L	HSK-PG29G-HL	PG29	14-21	37.00	15.00	54.00
C010412	HSK-PG29B-L	HSK-PG29G-L	PG29	18-25	37.00	15.00	54.00


HSK-G (G Thread)

Part No.	Item Black	Item Grey	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C010501	HSK-G1/2B-H	HSK-G1/2G-H	G1/2"	5-9	20.995	9.0	36.0
C010502	HSK-G1/2B	HSK-G1/2G	G1/2"	6-12	20.995	9.0	36.0
C010503	HSK-G3/4B	HSK-G3/4G	G3/4"	13-18	26.441	11.0	42.0
C010504	HSK-G1B	HSK-G1G	G1"	18-25	33.249	11.0	50.0
C010505	HSK-G1 1/2B	HSK-G1 1/2G	G1 1/2"	22-32	47.803	13.0	62.0
C010506	HSK-G2B	HSK-G2G	G2"	37-44	59.614	15.0	62.0

HSK-NPT (NPT Thread)

Part No.	Item Black	Item Grey	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C010601	HSK-NPT3/8B-H	HGK-NPT3/8G-H	NPT3/8"	4-8	17.055	11.0	36.0
C010602	HSK-NPT3/8B	HSK-NPT3/8G	NPT3/8"	5-10	17.055	11.0	36.0
C010603	HSK-NPT1/2B-H	HSK-NPT1/2G-H	NPT1/2"	5-10	21.223	13.0	40.0
C010604	HSK-NPT1/2B	HSK-NPT1/2G	NPT1/2"	6-12	21.223	13.0	40.0
C010605	HSK-NPT3/4B-H	HSK-NPT3/4G-H	NPT3/4"	11-16	26.568	13.0	45.0
C010606	HSK-NPT3/4B	HSK-NPT3/4G	NPT3/4"	13-18	26.568	13.0	45.0
C010607	HSK-NPT1B-H	HSK-NPT1G-H	NPT1"	14-21	33.227	16.0	55.0
C010608	HSK-NPT1B	HSK-NPT1G	NPT1"	18-25	33.227	16.0	55.0

Plastic Cable Glands, Multicore

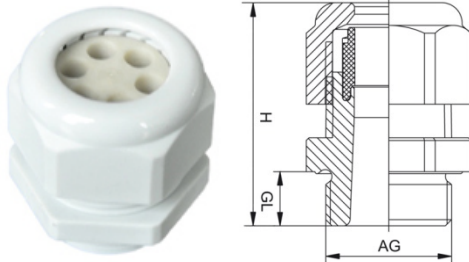

Material

■ Nylon PA

Features

■ Thread: M / PG

■ Seal: NBR (IP68 with O-Ring)

■ Temperature:

Static State: -40°C~100°C(-40°F~212°F)

Dynamic State: -20°C~80°C(-4°F~176°F)

■ Color: Black & Grey

*H: Thin Cable D: Thick Cable

HSKMC-M (Metric Thread)

Part No.	Item Black	Item Grey	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C010701	HSKMC-M16B-2x3	HSKMC-M16G-2x3	M16x1.5	2x3	16.0	8.0	28.0
C010702	HSKMC-M20B-2x2	HSKMC-M20G-2x2	M20x1.5	2x2	20.0	9.0	30.0
C010703	HSKMC-M20B-2x5	HSKMC-M20G-2x5	M20x1.5	2x5	20.0	9.0	30.0
C010704	HSKMC-M20B-6x2	HSKMC-M20G-6x2	M20x1.5	6x2	20.0	9.0	32.0
C010705	HSKMC-M20B-3x4	HSKMC-M20G-3x4	M20x1.5	3x4	20.0	9.0	32.0
C010706	HSKMC-M20B-6x3	HSKMC-M20G-6x3	M20x1.5	6x3	20.0	9.0	35.0
C010707	HSKMC-M24B-2x6	HSKMC-M24G-2x6	M24x1.5	2x6	24.0	10.0	35.0
C010708	HSKMC-M24B-3x4	HSKMC-M24G-3x4	M24x1.5	3x4	24.0	10.0	38.0
C010709	HSKMC-M24B-6x4	HSKMC-M24G-6x4	M24x1.5	6x4	24.0	10.0	38.0
C010710	HSKMC-M25B-2x8	HSKMC-M25G-2x8	M25x1.5	2x8	25.0	11.0	42.0
C010711	HSKMC-M25B-3x7	HSKMC-M25G-3x7	M25x1.5	3x7	25.0	11.0	42.0
C010712	HSKMC-M25B-4x6	HSKMC-M25G-4x6	M25x1.5	4x6	25.0	11.0	42.0
C010713	HSKMC-M32B-4x9	HSKMC-M32G-4x9	M32x1.5	4x9	32.0	11.0	50.0
C010714	HSKMC-M40B-2x15	HSKMC-M40G-2x15	M40x1.5	2x15	40.0	13.0	60.0
C010715	HSKMC-M40B-5x9	HSKMC-M40G-5x9	M40x1.5	5x9	40.0	13.0	60.0

HSKMC-PG (PG Thread)

Part No.	Item Black	Item Grey	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C010801	HSKMC-PG9B-2x3	HSKMC-PG9G-2x3	PG9	2x3	15.2	8.0	30.0
C010802	HSKMC-PG13.5B-2x5	HSKMC-PG13.5G-2x5	PG13.5	2x5	20.4	8.0	36.0
C010803	HSKMC-PG13.5B-6x2	HSKMC-PG13.5G-6x2	PG13.5	6x2	20.4	8.0	36.0
C010804	HSKMC-PG13.5B-3x4	HSKMC-PG13.5G-3x4	PG13.5	3x4	20.4	8.0	36.0
C010805	HSKMC-PG13.5B-6x3	HSKMC-PG13.5G-6x3	PG13.5	6x3	20.4	8.0	36.0
C010806	HSKMC-PG16B-3x4	HSKMC-PG16G-3x4	PG16	3x4	22.5	10.0	38.0
C010807	HSKMC-PG21B-2x8	HSKMC-PG21G-2x8	PG21	2x8	28.3	11.0	42.0
C010808	HSKMC-PG21B-3x7	HSKMC-PG21G-3x7	PG21	3x7	28.3	11.0	42.0
C010809	HSKMC-PG21B-4x6	HSKMC-PG21G-4x6	PG21	4x6	28.3	11.0	42.0

Plastic Elbow Cable Glands



Material

■ Nylon PA

Features

■ Thread: M / PG

■ Seal: NBR (IP68 with O-Ring)

■ Temperature:

Static State: -40°C~100°C(-40°F~212°F)

Dynamic State: -20°C~80°C(-4°F~176°F)

■ Color: Black & Grey

*H: Thin Cable D: Thick Cable

HSE-M (Metric Thread)

Part No.	Item Black	Item Grey	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C010901	HSE-M16B-H	HSE-M16G-H	M16x1.5	2-6	16	8	37
C010902	HSE-M16B	HSE-M16G	M16x1.5	4-8	16	8	37
C010903	HSE-M18B-H	HSE-M18G-H	M18x1.5	3-7	18	8	39
C010904	HSE-M18B	HSE-M18G	M18x1.5	5-10	18	8	39
C010905	HSE-M20B-H	HSE-M20G-H	M20x1.5	5-9	20	9	43
C010906	HSE-M20B	HSE-M20G	M20x1.5	6-12	20	9	43
C010907	HSE-M22B-H	HSE-M22G-H	M22x1.5	7-12	22	10	48
C010908	HSE-M22B	HSE-M22G	M22x1.5	10-14	22	10	48
C010909	HSE-M25B-H	HSE-M25G-H	M25x1.5	9-16	25	11	56
C010910	HSE-M25B	HSE-M25G	M25x1.5	13-18	25	11	56
C010911	HSE-M32B-H	HSE-M32G-H	M32x1.5	13-20	32	11	68
C010912	HSE-M32B	HSE-M32G	M32x1.5	18-25	32	11	68

HSE-PG (PG Thread)

Part No.	Item Black	Item Grey	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C011001	HSE-PG9B-H	HSE-PG9G-H	PG9	2-6	15.2	8.0	37.0
C011002	HSE-PG9B	HSE-PG9G	PG9	4-8	15.2	8.0	37.0
C011003	HSE-PG11B-H	HSE-PG11G-H	PG11	3-7	18.6	8.0	39.0
C011004	HSE-PG11B	HSE-PG11G	PG11	5-10	18.6	8.0	39.0
C011005	HSE-PG13.5B-H	HSE-PG13.5G-H	PG13.5	5-9	20.4	9.0	43.0
C011006	HSE-PG13.5B	HSE-PG13.5G	PG13.5	5-10	20.4	9.0	43.0
C011007	HSE-PG16B-H	HSE-PG16G-H	PG16	7-12	22.5	10.0	48.0
C011008	HSE-PG16B	HSE-PG16G	PG16	10-14	22.5	10.0	48.0
C011009	HSE-PG21B-H	HSE-PG21G-H	PG21	9-16	28.3	11.0	56.0
C011010	HSE-PG21B	HSE-PG21G	PG21	13-18	28.3	11.0	56.0
C011011	HSE-PG29B-H	HSE-PG29G-H	PG29	13-20	37.0	11.0	68.0
C011012	HSE-PG29B	HSE-PG29G	PG29	18-25	37.0	11.0	68.0



Plastic Spiral Glands

Material

■ Nylon PA

Features

■ Thread: M / PG / G / NPT

■ Seal: NBR (IP68 with O-Ring)

■ Temperature:

Static State: -40°C~100°C(-40°F~212°F)

Dynamic State: -20°C~80°C(-4°F~176°F)

■ Color: Black & Grey

*H: Thin Cable D: Thick Cable

HSW-M (Metric Thread)

Part No.	Item Black	Item Grey	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm
C011101	HSW-M12B-H	HSW-M12G-H	M12x1.5	2-5	12.0	8.0
C011102	HSW-M12B	HSW-M12G	M12x1.5	3-6.5	12.0	8.0
C011103	HSW-M16B-H	HSW-M16G-H	M16x1.5	2-6	16.0	8.0
C011104	HSW-M16B	HSW-M16G	M16x1.5	4-8	16.0	8.0
C011105	HSW-M16B-D	HSW-M16G-D	M16x1.5	5-10	16.0	8.0
C011106	HSW-M18B-H	HSW-M18G-H	M18x1.5	3-7	18.0	8.0
C011107	HSW-M18B	HSW-M18G	M18x1.5	5-10	18.0	8.0
C011108	HSW-M20B-H	HSW-M20G-H	M20x1.5	5-9	20.0	9.0
C011109	HSW-M20B	HSW-M20G	M20x1.5	6-12	20.0	9.0
C011110	HSW-M20B-D	HSW-M20G-D	M20x1.5	10-14	20.0	9.0
C011111	HSW-M22B-D	HSW-M22G-D	M22x1.5	7-12	22.0	10.0
C011112	HSW-M22B	HSW-M22G	M22x1.5	10-14	22.0	10.0
C011113	HSW-M25B-H	HSW-M25G-H	M25x1.5	9-16	25.0	10.0
C011114	HSW-M25B	HSW-M25G	M25x1.5	13-18	25.0	10.0
C011115	HSW-M27B-H	HSW-M27G-H	M27x1.5	9-16	27.0	10.0
C011116	HSW-M27B	HSW-M27G	M27x1.5	13-18	27.0	10.0

HSW-PG (PG Thread)

Part No.	Item Black	Item Grey	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm
C011201	HSW-PG7B-H	HSW-PG7G-H	PG7	2-5	12.5	8.0
C011202	HSW-PG7B	HSW-PG7G	PG7	3-6.5	12.5	8.0
C011203	HSW-PG9B-H	HSW-PG9G-H	PG9	2-6	15.2	8.0
C011204	HSW-PG9B	HSW-PG9G	PG9	4-8	15.2	8.0
C011205	HSW-PG11B-H	HSW-PG11G-H	PG11	3-7	18.6	8.0
C011206	HSW-PG11B	HSW-PG11G	PG11	5-10	18.6	8.0
C011207	HSW-PG13.5B-H	HSW-PG13.5G-H	PG13.5	5-9	20.4	9.0
C011208	HSW-PG13.5B	HSW-PG13.5G	PG13.5	6-12	20.4	9.0
C011209	HSW-PG16B	HSW-PG16G	PG16	10-14	22.5	10.0
C011210	HSW-PG21B	HSW-PG21G	PG21	13-18	28.3	10.0

Plastic Spiral Glands


HSW-G (G Thread)

Part No.	Item Black	Item Grey	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm
C011301	HSW-G1/4B-H	HSW-G1/4G-H	G1/4"	2-5	13.1	8.0
C011302	HSW-G1/4B	HSW-G1/4G	G1/4"	3-6.5	13.1	8.0
C011303	HSW-G3/8B-H	HSW-G3/8G-H	G3/8"	2-6	16.6	13.0
C011304	HSW-G3/8B	HSW-G3/8G	G3/8"	4-8	16.6	13.0
C011305	HSW-G3/8B-D	HSW-G3/8G-D	G3/8"	5-10	16.6	13.0
C011306	HSW-G1/2B-H	HSW-G1/2G-H	G1/2"	3-7	20.9	13.0
C011307	HSW-G1/2B	HSW-G1/2G	G1/2"	6-12	20.9	13.0
C011308	HSW-G1/2B-D	HSW-G1/2G-D	G1/2"	10-14	20.9	13.0
C011309	HSW-G3/4B-H	HSW-G3/4G-H	G3/4"	9-16	26.4	15.0
C011310	HSW-G3/4B	HSW-G3/4G	G3/4"	13-18	26.4	15.0

HSW-NPT (NPT Thread)

Part No.	Item Black	Item Grey	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm
C011401	HSW-NPT1/4B-H	HSW-NPT1/4G-H	NPT1/4"	2-5	13.7	8.0
C011402	HSW-NPT1/4B	HSW-NPT1/4G	NPT1/4"	3-6.5	13.7	8.0
C011403	HSW-NPT3/8B-H	HSW-NPT3/8G-H	NPT3/8"	2-6	17.0	13.0
C011404	HSW-NPT3/8B	HSW-NPT3/8G	NPT3/8"	4-8	17.0	13.0
C011405	HSW-NPT3/8B-D	HSW-NPT3/8G-D	NPT3/8"	5-10	17.0	13.0
C011406	HSW-NPT1/2B-H	HSW-NPT1/2G-H	NPT1/2"	3-7	21.2	13.0
C011407	HSW-NPT1/2B	HSW-NPT1/2G	NPT1/2"	6-12	21.2	13.0
C011408	HSW-NPT1/2B-D	HSW-NPT1/2G-D	NPT1/2"	10-14	21.2	13.0
C011409	HSW-NPT3/4B-H	HSW-NPT3/4G-H	NPT3/4"	9-16	26.2	15.0
C011410	HSW-NPT3/4B	HSW-NPT3/4G	NPT3/4"	13-18	26.2	15.0

Cable Glands, Nickel-plated Brass



Material

■ Brass with nickel-plated

Features

- Thread: M / M-L / PG / PG-L / G / NPT
- Seal: NBR (IP68 with O-Ring)
- Temperature:
-40°C~100°C(-40°F~212°F)
- Color: Silvery

*H: Thin Cable D: Thick Cable

HSM-M (Metric Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C020101	HSM-M12	M12x1.5	3-6.5	12.0	6.0	19.0
C020102	HSM-M16-H	M16x1.5	3-6.5	16.0	7.0	20.0
C020103	HSM-M16	M16x1.5	4-8	16.0	7.0	21.0
C020104	HSM-M16-D	M16x1.5	5-10	16.0	7.0	23.0
C020105	HSM-M18	M18x1.5	5-10	18.0	7.0	23.0
C020106	HSM-M20-H	M20x1.5	5-10	20.0	7.0	23.0
C020107	HSM-M20	M20x1.5	6-12	20.0	7.0	24.0
C020108	HSM-M20-D	M20x1.5	8-14	20.0	7.0	24.0
C020109	HSM-M22	M22x1.5	8-14	22.0	7.0	24.0
C020110	HSM-M24-H	M24x1.5	6-12	24.0	7.0	24.0
C020111	HSM-M24	M24x1.5	8-14	24.0	7.0	24.0
C020112	HSM-M25-H	M25x1.5	8-14	25.0	7.0	24.0
C020113	HSM-M25	M25x1.5	10-16	25.0	7.0	24.0
C020114	HSM-M25-D	M25x1.5	13-18	25.0	7.0	26.0
C020115	HSM-M27-H	M27x1.5	10-16	27.0	8.0	26.0
C020116	HSM-M27	M27x1.5	13-18	27.0	8.0	26.0
C020117	HSM-M30-H	M30x1.5	10-16	30.0	8.0	26.0
C020118	HSM-M30	M30x1.5	13-18	30.0	8.0	26.0
C020119	HSM-M32-H	M32x1.5	13-18	32.0	8.0	26.0
C020120	HSM-M32	M32x1.5	15-22	32.0	8.0	28.0
C020121	HSM-M32-D	M32x1.5	18-25	32.0	8.0	33.0
C020122	HSM-M33	M33x1.5	18-25	33.0	8.0	33.0
C020123	HSM-M36-H	M36x1.5	15-22	36.0	8.0	28.0
C020124	HSM-M36	M36x1.5	18-25	36.0	8.0	33.0
C020125	HSM-M40-H	M40x1.5	18-25	40.0	9.0	33.0
C020126	HSM-M40	M40x1.5	22-32	40.0	9.0	36.0
C020127	HSM-M42	M42x1.5	22-32	42.0	9.0	38.0
C020128	HSM-M48	M48x1.5	22-32	48.0	9.0	38.0
C020129	HSM-M50	M50x1.5	30-38	50.0	9.0	40.0
C020130	HSM-M56	M56x1.5	30-38	56.0	10.0	40.0
C020131	HSM-M60	M60x1.5	37-44	60.0	10.0	42.0
C020132	HSM-M63	M63x1.5	37-44	63.0	10.0	42.0
C020133	HSM-M64	M64x1.5	37-44	64.0	10.0	42.0
C020134	HSM-M72	M72x1.5	55-61	72.0	12.0	43.0
C020135	HSM-M75	M75x1.5	55-61	75.0	12.0	43.0
C020136	HSM-M80	M80x1.5	55-61	80.0	12.0	43.0

Cable Glands, Nickel-plated Brass

HSM-M-L (Metric with Lengthened Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C020201	HSM-M12-L	M12x1.5	3-6.5	12.0	10.0	19.0
C020202	HSM-M16-H-L	M16x1.5	3-6.5	16.0	10.0	20.0
C020203	HSM-M16-L	M16x1.5	4-8	16.0	10.0	21.0
C020204	HSM-M16-D-L	M16x1.5	5-10	16.0	10.0	23.0
C020205	HSM-M18 - L	M18x1.5	5-10	18.0	10.0	23.0
C020206	HSM-M20-H-L	M20x1.5	5-10	20.0	10.0	23.0
C020207	HSM-M20-L	M20x1.5	6-12	20.0	10.0	24.0
C020208	HSM-M20-D-L	M20x1.5	8-14	20.0	10.0	24.0
C020209	HSM-M22-L	M22x1.5	8-14	22.0	10.0	24.0
C020210	HSM-M24-H-L	M24x1.5	6-12	24.0	12.0	24.0
C020211	HSM-M24-L	M24x1.5	8-14	24.0	12.0	24.0
C020212	HSM-M25-H-L	M25x1.5	8-14	25.0	12.0	24.0
C020213	HSM-M25-L	M25x1.5	10-16	25.0	12.0	24.0
C020214	HSM-M25-D-L	M25x1.5	13-18	25.0	12.0	26.0
C020215	HSM-M27-H-L	M27x1.5	10-16	27.0	12.0	26.0
C020216	HSM-M27-L	M27x1.5	13-18	27.0	12.0	26.0
C020217	HSM-M30-H-L	M30x1.5	10-16	30.0	12.0	26.0
C020218	HSM-M30 - L	M30x1.5	13-18	30.0	12.0	26.0
C020219	HSM-M32-H-L	M32x1.5	13-18	32.0	12.0	26.0
C020220	HSM-M32-L	M32x1.5	15-22	32.0	12.0	28.0
C020221	HSM-M32-D-L	M32x1.5	18-25	32.0	12.0	33.0
C020222	HSM-M33-L	M33x1.5	18-25	33.0	12.0	33.0
C020223	HSM-M36-H-L	M36x1.5	15-22	36.0	12.0	28.0
C020224	HSM-M36-L	M36x1.5	18-25	36.0	12.0	33.0
C020225	HSM-M40-H-L	M40x1.5	18-25	40.0	15.0	33.0
C020226	HSM-M40-L	M40x1.5	22-32	40.0	15.0	36.0
C020227	HSM-M42-L	M42x1.5	22-32	42.0	15.0	38.0
C020228	HSM-M48-L	M48x1.5	22-32	48.0	15.0	38.0
C020229	HSM-M50-L	M50x1.5	30-38	50.0	15.0	40.0
C020230	HSM-M56-L	M56x1.5	30-38	56.0	15.0	40.0
C020231	HSM-M60-L	M60x1.5	37-44	60.0	15.0	42.0
C020232	HSM-M63-L	M63x1.5	37-44	63.0	15.0	42.0
C020233	HSM-M64-L	M64x1.5	37-44	64.0	15.0	42.0

HSM-PG (PG Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C020301	HSM-PG7	PG7	3-6.5	12.5	6.0	25.0
C020302	HSM-PG9-H	PG9	2.5-6	15.2	7.0	27.0
C020303	HSM-PG9	PG9	4-8	15.2	7.0	28.0
C020304	HSM-PG11	PG11	5-10	18.6	7.0	30.0
C020305	HSM-PG13.5-H	PG13.5	5-10	20.4	7.0	30.0
C020306	HSM-PG13.5	PG13.5	6-12	20.4	7.0	31.0
C020307	HSM-PG16-H	PG16	6-12	22.5	7.0	31.0
C020308	HSM-PG16	PG16	8-14	22.5	7.0	31.0
C020309	HSM-PG21-H	PG21	11-16	28.3	7.0	32.0
C020310	HSM-PG21	PG21	13-18	28.3	7.0	33.0
C020311	HSM-PG29-H	PG29	14-21	37.0	8.0	36.0
C020312	HSM-PG29	PG29	18-25	37.0	8.0	42.0
C020313	HSM-PG36	PG36	22-32	47.0	9.0	47.0
C020314	HSM-PG42	PG36	30-38	54.0	9.0	49.0
C020315	HSM-PG48	PG48	37-44	59.3	10.0	52.0

Cable Glands, Nickel-plated Brass

HSM-PG-L (PG with Lengthened Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C020401	HSM-PG7-L	PG7	3-6.5	12.5	10.0	29.0
C020402	HSM-PG9-HL	PG9	2.5-6	15.2	10.0	29.0
C020403	HSM-PG9-L	PG9	4-8	15.2	10.0	30.0
C020404	HSM-PG11-L	PG11	5-10	18.6	10.0	33.0
C020405	HSM-PG13.5-HL	PG13.5	5-10	20.4	10.0	33.0
C020406	HSM-PG13.5-L	PG13.5	6-12	20.4	10.0	34.0
C020407	HSM-PG16-HL	PG16	6-12	22.5	10.0	34.0
C020408	HSM-PG16-L	PG16	8-14	22.5	10.0	34.0
C020409	HSM-PG21-H-L	PG21	11-16	28.3	12.0	36.0
C020410	HSM-PG21-L	PG21	13-18	28.3	12.0	37.0
C020411	HSM-PG29-H-L	PG29	14-21	37.0	12.0	40.0
C020412	HSM-PG29-L	PG29	18-25	37.0	12.0	45.0


HSM-G (Metric Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C020501	HSM-G3/8	G3/8"	4-8	16.662	8.0	29.0
C020502	HSM-G1/2-H	G1/2"	5-10	20.995	8.0	31.0
C020503	HSM-G1/2	G1/2"	6-12	20.995	8.0	32.0
C020504	HSM-G1/2-D	G1/2"	8-14	20.995	8.0	32.0
C020505	HSM-G3/4-H	G3/4"	8-14	26.441	8.0	32.0
C020506	HSM-G3/4	G3/4"	13-18	26.441	8.0	34.0
C020507	HSM-G1	G1"	18-25	33.249	9.0	42.0
C020508	HSM-G1 1/4	G1 1/4"	22-32	41.91	10.0	46.0
C020509	HSM-G1 1/2	G1 1/2"	30-38	47.803	10.0	50.0
C020510	HSM-G2	G2"	37-44	59.614	11.0	52.5

HSM-NPT (NPT Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C020601	HSM-NPT3/8	NPT3/8"	4-8	17.055	11.0	33.0
C020602	HSM-NPT1/2-H	NPT1/2"	5-10	21.223	13.0	36.0
C020603	HSM-NPT1/2	NPT1/2"	6-12	21.223	13.0	37.0
C020604	HSM-NPT3/4-H	NPT3/4"	8-14	26.568	13.0	37.0
C020605	HSM-NPT3/4	NPT3/4"	13-18	26.568	13.0	39.0
C020606	HSM-NPT1	NPT1"	18-25	33.227	15.0	49.0

Cable Glands, Stainless Steel

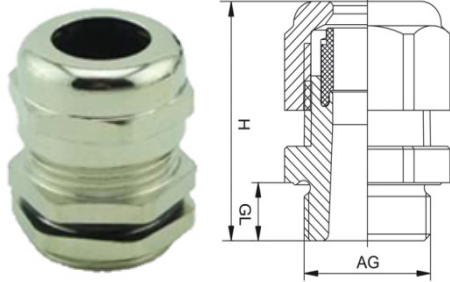

Material

■ Stainless Steel 304

Features

- Thread: M / M-L / PG / PG-L / G / NPT
- Seal: NBR (IP68 with O-Ring)
- Temperature:
-40°C~100°C(-40°F~212°F)
- Color: Silvery

*H: Thin Cable D: Thick Cable

HSS-M (Metric Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C020701	HSS-M12	M12x1.5	3-6.5	12.0	6.0	19.0
C020702	HSS-M16-H	M16x1.5	3-6.5	16.0	7.0	20.0
C020703	HSS-M16	M16x1.5	4-8	16.0	7.0	21.0
C020704	HSS-M16-D	M16x1.5	5-10	16.0	7.0	23.0
C020705	HSS-M18	M18x1.5	5-10	18.0	7.0	23.0
C020706	HSS-M20-H	M20x1.5	5-10	20.0	7.0	23.0
C020707	HSS-M20	M20x1.5	6-12	20.0	7.0	24.0
C020708	HSS-M20-D	M20x1.5	8-14	20.0	7.0	24.0
C020709	HSS-M22	M22x1.5	8-14	22.0	7.0	24.0
C020710	HSS-M24-H	M24x1.5	6-12	24.0	7.0	24.0
C020711	HSS-M24	M24x1.5	8-14	24.0	7.0	24.0
C020712	HSS-M25-H	M25x1.5	8-14	25.0	7.0	24.0
C020713	HSS-M25	M25x1.5	10-16	25.0	7.0	24.0
C020714	HSS-M25-D	M25x1.5	13-18	25.0	7.0	26.0
C020715	HSS-M27-H	M27x1.5	10-16	27.0	8.0	26.0
C020716	HSS-M27	M27x1.5	13-18	27.0	8.0	26.0
C020717	HSS-M30-H	M30x1.5	10-16	30.0	8.0	26.0
C020718	HSS-M30	M30x1.5	13-18	30.0	8.0	26.0
C020719	HSS-M32-H	M32x1.5	13-18	32.0	8.0	26.0
C020720	HSS-M32	M32x1.5	15-22	32.0	8.0	28.0
C020721	HSS-M32-D	M32x1.5	18-25	32.0	8.0	33.0
C020722	HSS-M33	M33x1.5	18-25	33.0	8.0	33.0
C020723	HSS-M36-H	M36x1.5	15-22	36.0	8.0	28.0
C020724	HSS-M36	M36x1.5	18-25	36.0	8.0	33.0
C020725	HSS-M40-H	M40x1.5	18-25	40.0	9.0	33.0
C020726	HSS-M40	M40x1.5	22-32	40.0	9.0	36.0
C020727	HSS-M42	M42x1.5	22-32	42.0	9.0	38.0
C020728	HSS-M48	M48x1.5	22-32	48.0	9.0	38.0
C020729	HSS-M50	M50x1.5	30-38	50.0	9.0	40.0
C020730	HSS-M56	M56x1.5	30-38	56.0	10.0	40.0
C020731	HSS-M60	M60x1.5	37-44	60.0	10.0	42.0
C020732	HSS-M63	M63x1.5	37-44	63.0	10.0	42.0
C020733	HSS-M64	M64x1.5	37-44	64.0	10.0	42.0
C020734	HSS-M72	M72x1.5	55-61	72.0	12.0	43.0
C020735	HSS-M75	M75x1.5	55-61	75.0	12.0	43.0
C020736	HSS-M80	M80x1.5	55-61	80.0	12.0	43.0

Cable Glands, Stainless Steel

HSS-M-L (Metric with Lengthened Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C020801	HSS-M12-L	M12x1.5	3-6.5	12.0	10.0	19.0
C020802	HSS-M16-H-L	M16x1.5	3-6.5	16.0	10.0	20.0
C020803	HSS-M16-L	M16x1.5	4-8	16.0	10.0	21.0
C020804	HSS-M16-D-L	M16x1.5	5-10	16.0	10.0	23.0
C020805	HSS-M18-L	M18x1.5	5-10	18.0	10.0	23.0
C020806	HSS-M20-H-L	M20x1.5	5-10	20.0	10.0	23.0
C020807	HSS-M20-L	M20x1.5	6-12	20.0	10.0	24.0
C020808	HSS-M20-D-L	M20x1.5	8-14	20.0	10.0	24.0
C020809	HSS-M22-L	M22x1.5	8-14	22.0	10.0	24.0
C020810	HSS-M24-H-L	M24x1.5	6-12	24.0	12.0	24.0
C020811	HSS-M24-L	M24x1.5	8-14	24.0	12.0	24.0
C020812	HSS-M25-H-L	M25x1.5	8-14	25.0	12.0	24.0
C020813	HSS-M25-L	M25x1.5	10-16	25.0	12.0	24.0
C020814	HSS-M25-D-L	M25x1.5	13-18	25.0	12.0	26.0
C020815	HSS-M27-H-L	M27x1.5	10-16	27.0	12.0	26.0
C020816	HSS-M27-L	M27x1.5	13-18	27.0	12.0	26.0
C020817	HSS-M30-H-L	M30x1.5	10-16	30.0	12.0	26.0
C020818	HSS-M30-L	M30x1.5	13-18	30.0	12.0	26.0
C020819	HSS-M32-H-L	M32x1.5	13-18	32.0	12.0	26.0
C020820	HSS-M32-L	M32x1.5	15-22	32.0	12.0	28.0
C020821	HSS-M32-D-L	M32x1.5	18-25	32.0	12.0	33.0
C020822	HSS-M33-L	M33x1.5	18-25	33.0	12.0	33.0
C020823	HSS-M36-H-L	M36x1.5	15-22	36.0	12.0	28.0
C020824	HSS-M36-L	M36x1.5	18-25	36.0	12.0	33.0
C020825	HSS-M40-H-L	M40x1.5	18-25	40.0	15.0	33.0
C020826	HSS-M40-L	M40x1.5	22-32	40.0	15.0	36.0
C020827	HSS-M42-L	M42x1.5	22-32	42.0	15.0	38.0
C020828	HSS-M48-L	M48x1.5	22-32	48.0	15.0	38.0
C020829	HSS-M50-L	M50x1.5	30-38	50.0	15.0	40.0
C020830	HSS-M56-L	M56x1.5	30-38	56.0	15.0	40.0
C020831	HSS-M60-L	M60x1.5	37-44	60.0	15.0	42.0
C020832	HSS-M63-L	M63x1.5	37-44	63.0	15.0	42.0
C020833	HSS-M64-L	M64x1.5	37-44	64.0	15.0	42.0

HSS-G (G Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C020901	HSS-PG7	PG7	3-6.5	12.5	6.0	25.0
C020902	HSS-PG9-H	PG9	2.5-6	15.2	7.0	27.0
C020903	HSS-PG9	PG9	4-8	15.2	7.0	28.0
C020904	HSS-PG11	PG11	5-10	18.6	7.0	30.0
C020905	HSS-PG13.5-H	PG13.5	5-10	20.4	7.0	30.0
C020906	HSS-PG13.5	PG13.5	6-12	20.4	7.0	31.0
C020907	HSS-PG16-H	PG16	6-12	22.5	7.0	31.0
C020908	HSS-PG16	PG16	8-14	22.5	7.0	31.0
C020909	HSS-PG21-H	PG21	11-16	28.3	7.0	32.0
C020910	HSS-PG21	PG21	13-18	28.3	7.0	33.0
C020911	HSS-PG29-H	PG29	14-21	37.0	8.0	36.0
C020912	HSS-PG29	PG29	18-25	37.0	8.0	42.0
C020913	HSS-PG36	PG36	22-32	47.0	9.0	47.0
C020914	HSS-PG42	PG36	30-38	54.0	9.0	49.0
C020915	HSS-PG48	PG48	37-44	59.3	10.0	52.0

Cable Glands, Stainless Steel

HSS-PG (PG Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C021001	HSS-PG7-L	PG7	3-6.5	12.50	10.00	29.00
C021002	HSS-PG9-HL	PG9	2.5-6	15.20	10.00	29.00
C021003	HSS-PG9-L	PG9	4-8	15.20	10.00	30.00
C021004	HSS-PG11-L	PG11	5-10	18.60	10.00	33.00
C021005	HSS-PG13.5-HL	PG13.5	5-10	20.40	10.00	33.00
C021006	HSS-PG13.5-L	PG13.5	6-12	20.40	10.00	34.00
C021007	HSS-PG16-HL	PG16	6-12	22.50	10.00	34.00
C021008	HSS-PG16-L	PG16	8-14	22.50	10.00	34.00
C021009	HSS-PG21-H-L	PG21	11-16	28.30	12.00	36.00
C021010	HSS-PG21-L	PG21	13-18	28.30	12.00	37.00
C021011	HSS-PG29-H-L	PG29	14-21	37.00	12.00	40.00
C021012	HSS-PG29-L	PG29	18-25	37.00	12.00	45.00


HSS-PG-L (PG with Lengthened Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C021101	HSS-G3/8	G3/8"	4-8	16.662	8.0	29.0
C021102	HSS-G1/2-H	G1/2"	5-10	20.995	8.0	31.0
C021103	HSS-G1/2	G1/2"	6-12	20.995	8.0	32.0
C021104	HSS-G1/2-D	G1/2"	8-14	20.995	8.0	32.0
C021105	HSS-G3/4-H	G3/4"	8-14	26.441	8.0	32.0
C021106	HSS-G3/4	G3/4"	13-18	26.441	8.0	34.0
C021107	HSS-G1	G1"	18-25	33.249	9.0	42.0
C021108	HSS-G1 1/4	G1 1/4"	22-32	41.91	10.0	46.0
C021109	HSS-G1 1/2	G1 1/2"	30-38	47.803	10.0	50.0
C021110	HSS-G2	G2"	37-44	59.614	11.0	52.5

HSS-NPT (NPT Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C021201	HSS-NPT3/8	NPT3/8"	4-8	17.055	11.0	33.0
C021202	HSS-NPT1/2-H	NPT1/2"	5-10	21.223	13.0	36.0
C021203	HSS-NPT1/2	NPT1/2"	6-12	21.223	13.0	37.0
C021204	HSS-NPT3/4-H	NPT3/4"	8-14	26.568	13.0	37.0
C021205	HSS-NPT3/4	NPT3/4"	13-18	26.568	13.0	39.0
C021206	HSS-NPT1	NPT1"	18-25	33.227	15.0	49.0

Cable Glands, EMC

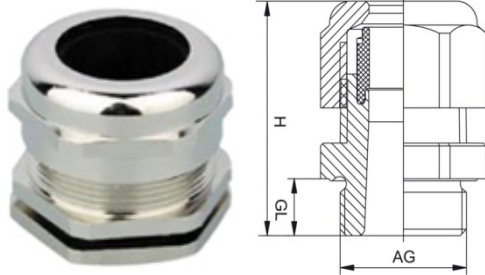

Material

■ Brass with nickel-plated

Features

- Thread: M / PG
- Seal: NBR (IP68 with O-Ring)
- Temperature: -40°C~100°C(-40°F~212°F)
- Color: Silvery

*H: Thin Cable D: Thick Cable

HSME-M (Metric Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C021301	HSME-M12	M12x1.5	3-6	12.0	6.0	26.0
C021302	HSME-M16	M16x1.5	4-8	16.0	7.0	30.0
C021303	HSME-M18	M18x1.5	5-10	18.0	7.0	31.0
C021304	HSME-M20	M20x1.5	6-12	20.0	7.0	32.0
C021305	HSME-M24	M24x1.5	8-14	24.0	7.0	32.0
C021306	HSME-M25	M25x1.5	10-16	25.0	7.0	34.0
C021307	HSME-M32	M32x1.5	15-22	32.0	8.0	38.0
C021308	HSME-M36	M36x2.0	18-25	36.0	8.0	43.0
C021309	HSME-M40	M40x1.5	22-30	40.0	9.0	47.0
C021310	HSME-M48	M48x2.0	22-32	48.0	9.0	49.0
C021311	HSME-M50	M50x1.5	30-38	50.0	9.0	52.0
C021312	HSME-M56	M56x2.0	30-38	56.0	9.0	52.0

HSME-PG (PG Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C021401	HSME-PG7	PG7	3-6.5	12.5	6.0	26.0
C021402	HSME-PG9	PG9	4-8	15.2	7.0	29.0
C021403	HSME-PG11	PG11	5-10	18.6	7.0	31.0
C021404	HSME-PG13.5	PG13.5	6-12	20.4	7.0	33.0
C021405	HSME-PG16	PG16	8-14	22.5	7.0	33.0
C021406	HSME-PG21	PG21	13-18	28.3	8.0	36.0
C021407	HSME-PG29	PG29	18-25	37.0	8.0	43.0
C021408	HSME-PG36	PG36	22-32	47.0	9.0	49.5
C021409	HSME-PG42	PG42	30-38	54.0	9.0	49.5
C021410	HSME-PG48	PG48	37-44	59.3	10.0	53.0


Cable Glands, EMC

Material

- Stainless Steel 304

Features

- Thread: M / PG
- Seal: NBR (IP68 with O-Ring)
- Temperature:
-40°C~100°C(-40°F~212°F)
- Color: Silvery

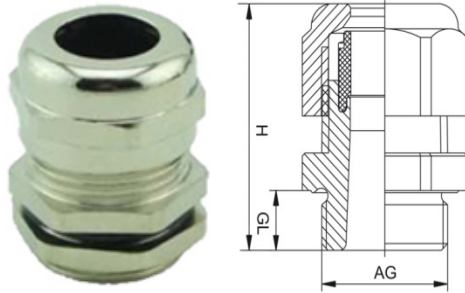

*H: Thin Cable D: Thick Cable


HSSE-M (Metric Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C021501	HSSE-M12	M12x1.5	3-6	12.0	6.0	26.0
C021502	HSSE-M16	M16x1.5	4-8	16.0	7.0	30.0
C021503	HSSE-M18	M18x1.5	5-10	18.0	7.0	31.0
C021504	HSSE-M20	M20x1.5	6-12	20.0	7.0	32.0
C021505	HSSE-M24	M24x1.5	8-14	24.0	7.0	32.0
C021506	HSSE-M25	M25x1.5	10-16	25.0	7.0	34.0
C021507	HSSE-M32	M32x1.5	15-22	32.0	8.0	38.0
C021508	HSSE-M36	M36x2.0	18-25	36.0	8.0	43.0
C021509	HSSE-M40	M40x1.5	22-30	40.0	9.0	47.0
C021510	HSSE-M48	M48x2.0	22-32	48.0	9.0	49.0
C021511	HSSE-M50	M50x1.5	30-38	50.0	9.0	52.0
C021512	HSSE-M56	M56x2.0	30-38	56.0	9.0	52.0

HSSE-PG (PG Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C021601	HSSE-PG7	PG7	3-6.5	12.5	6.0	26.0
C021602	HSSE-PG9	PG9	4-8	15.2	7.0	29.0
C021603	HSSE-PG11	PG11	5-10	18.6	7.0	31.0
C021604	HSSE-PG13.5	PG13.5	6-12	20.4	7.0	33.0
C021605	HSSE-PG16	PG16	8-14	22.5	7.0	33.0
C021606	HSSE-PG21	PG21	13-18	28.3	8.0	36.0
C021607	HSSE-PG29	PG29	18-25	37.0	8.0	43.0
C021608	HSSE-PG36	PG36	22-32	47.0	9.0	49.5
C021609	HSSE-PG42	PG42	30-38	54.0	9.0	49.5
C021610	HSSE-PG48	PG48	37-44	59.3	10.0	53.0

Cable Glands, Explosion-proof



Material

- Brass with nickel-plated

Features

- Thread: M / M-L / PG / PG-L / G / NPT
- Seal: NBR (IP68 with O-Ring)
- Temperature: -40°C~100°C(-40°F~212°F)
- Color: Silvery

*H: Thin Cable D: Thick Cable

HSM-EXD-M (Metric Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C021701	HSM-Exd-M12	M12x1.5	3-6.5	12.0	6.0	19.0
C021702	HSM-Exd-M16-H	M16x1.5	3-6.5	16.0	7.0	20.0
C021703	HSM-Exd-M16	M16x1.5	4-8	16.0	7.0	21.0
C021704	HSM-Exd-M16-D	M16x1.5	5-10	16.0	7.0	23.0
C021705	HSM-Exd-M18	M18x1.5	5-10	18.0	7.0	23.0
C021706	HSM-Exd-M20-H	M20x1.5	5-10	20.0	7.0	23.0
C021707	HSM-Exd-M20	M20x1.5	6-12	20.0	7.0	24.0
C021708	HSM-Exd-M20-D	M20x1.5	8-14	20.0	7.0	24.0
C021709	HSM-Exd-M22	M22x1.5	8-14	22.0	7.0	24.0
C021710	HSM-Exd-M24-H	M24x1.5	6-12	24.0	7.0	24.0
C021711	HSM-Exd-M24	M24x1.5	8-14	24.0	7.0	24.0
C021712	HSM-Exd-M25-H	M25x1.5	8-14	25.0	7.0	24.0
C021713	HSM-Exd-M25	M25x1.5	10-16	25.0	7.0	24.0
C021714	HSM-Exd-M25-D	M25x1.5	13-18	25.0	7.0	26.0
C021715	HSM-Exd-M27-H	M27x1.5	10-16	27.0	8.0	26.0
C021716	HSM-Exd-M27	M27x1.5	13-18	27.0	8.0	26.0
C021717	HSM-Exd-M30-H	M30x1.5	10-16	30.0	8.0	26.0
C021718	HSM-Exd-M30	M30x1.5	13-18	30.0	8.0	26.0
C021719	HSM-Exd-M32-H	M32x1.5	13-18	32.0	8.0	26.0
C021720	HSM-Exd-M32	M32x1.5	15-22	32.0	8.0	28.0
C021721	HSM-Exd-M32-D	M32x1.5	18-25	32.0	8.0	33.0
C021722	HSM-Exd-M33	M33x1.5	18-25	33.0	8.0	33.0
C021723	HSM-Exd-M36-H	M36x1.5	15-22	36.0	8.0	28.0
C021724	HSM-Exd-M36	M36x1.5	18-25	36.0	8.0	33.0
C021725	HSM-Exd-M40-H	M40x1.5	18-25	40.0	9.0	33.0
C021726	HSM-Exd-M40	M40x1.5	22-32	40.0	9.0	36.0
C021727	HSM-Exd-M42	M42x1.5	22-32	42.0	9.0	38.0
C021728	HSM-Exd-M48	M48x1.5	22-32	48.0	9.0	38.0
C021729	HSM-Exd-M50	M50x1.5	30-38	50.0	9.0	40.0
C021730	HSM-Exd-M56	M56x1.5	30-38	56.0	10.0	40.0
C021731	HSM-Exd-M60	M60x1.5	37-44	60.0	10.0	42.0
C021732	HSM-Exd-M63	M63x1.5	37-44	63.0	10.0	42.0
C021733	HSM-Exd-M64	M64x1.5	37-44	64.0	10.0	42.0
C021734	HSM-Exd-M72	M72x1.5	55-61	72.0	12.0	43.0
C021735	HSM-Exd-M75	M75x1.5	55-61	75.0	12.0	43.0
C021736	HSM-Exd-M80	M80x1.5	55-61	80.0	12.0	43.0

Cable Glands, Explosion-proof

HSM-EXD-M-L (Metric with Lengthened Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C021801	HSM-Exd-M12-L	M12x1.5	3-6.5	12.0	10.0	19.0
C021802	HSM-Exd-M16-H-L	M16x1.5	3-6.5	16.0	10.0	20.0
C021803	HSM-Exd-M16-L	M16x1.5	4~8	16.0	10.0	21.0
C021804	HSM-Exd-M16-D-L	M16x1.5	5~10	16.0	10.0	23.0
C021805	HSM-Exd-M18-L	M18x1.5	5-10	18.0	10.0	23.0
C021806	HSM-Exd-M20-H-L	M20x1.5	5~10	20.0	10.0	23.0
C021807	HSM-Exd-M20-L	M20x1.5	6-12	20.0	10.0	24.0
C021808	HSM-Exd-M20-D-L	M20x1.5	8~14	20.0	10.0	24.0
C021809	HSM-Exd-M22-L	M22x1.5	8~14	22.0	10.0	24.0
C021810	HSM-Exd-M24-H-L	M24x1.5	6-12	24.0	12.0	24.0
C021811	HSM-Exd-M24-L	M24x1.5	8~14	24.0	12.0	24.0
C021812	HSM-Exd-M25-H-L	M25x1.5	8~14	25.0	12.0	24.0
C021813	HSM-Exd-M25-L	M25x1.5	10-16	25.0	12.0	24.0
C021814	HSM-Exd-M25-D-L	M25x1.5	13-18	25.0	12.0	26.0
C021815	HSM-Exd-M27-H-L	M27x1.5	10-16	27.0	12.0	26.0
C021816	HSM-Exd-M27-L	M27x1.5	13-18	27.0	12.0	26.0
C021817	HSM-Exd-M30-H-L	M30x1.5	10-16	30.0	12.0	26.0
C021818	HSM-Exd-M30-L	M30x1.5	13-18	30.0	12.0	26.0
C021819	HSM-Exd-M32-H-L	M32x1.5	13-18	32.0	12.0	26.0
C021820	HSM-Exd-M32-L	M32x1.5	15-22	32.0	12.0	28.0
C021821	HSM-Exd-M32-D-L	M32x1.5	18-25	32.0	12.0	33.0
C021822	HSM-Exd-M33-L	M33x1.5	18-25	33.0	12.0	33.0
C021823	HSM-Exd-M36-H-L	M36x1.5	15-22	36.0	12.0	28.0
C021824	HSM-Exd-M36-L	M36x1.5	18-25	36.0	12.0	33.0
C021825	HSM-Exd-M40-H-L	M40x1.5	18-25	40.0	15.0	33.0
C021826	HSM-Exd-M40-L	M40x1.5	22-32	40.0	15.0	36.0
C021827	HSM-Exd-M42-L	M42x1.5	22-32	42.0	15.0	38.0
C021828	HSM-Exd-M48-L	M48x1.5	22-32	48.0	15.0	38.0
C021829	HSM-Exd-M50-L	M50x1.5	30-38	50.0	15.0	40.0
C021830	HSM-Exd-M56-L	M56x1.5	30-38	56.0	15.0	40.0
C021831	HSM-Exd-M60-L	M60x1.5	37-44	60.0	15.0	42.0
C021832	HSM-Exd-M63-L	M63x1.5	37-44	63.0	15.0	42.0
C021833	HSM-Exd-M64-L	M64x1.5	37-44	64.0	15.0	42.0

HSM-EXD-G (G Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C021901	HSM-Exd-PG7	PG7	3-6.5	12.5	6.0	25.0
C021902	HSM-Exd-PG9-H	PG9	2.5-6	15.2	7.0	27.0
C021903	HSM-Exd-PG9	PG9	4-8	15.2	7.0	28.0
C021904	HSM-Exd-PG11	PG11	5-10	18.6	7.0	30.0
C021905	HSM-Exd-PG13.5-H	PG13.5	5-10	20.4	7.0	30.0
C021906	HSM-Exd-PG13.5	PG13.5	6-12	20.4	7.0	31.0
C021907	HSM-Exd-PG16-H	PG16	6-12	22.5	7.0	31.0
C021908	HSM-Exd-PG 16	PG16	8-14	22.5	7.0	31.0
C021909	HSM-Exd-PG21-H	PG21	11-16	28.3	7.0	32.0
C021910	HSM-Exd-PG21	PG21	13-18	28.3	7.0	33.0
C021911	HSM-Exd-PG29-H	PG29	14-21	37.0	8.0	36.0
C021912	HSM-Exd-PG29	PG29	18-25	37.0	8.0	42.0
C021913	HSM-Exd-PG36	PG36	22-32	47.0	9.0	47.0
C021914	HSM-Exd-PG42	PG36	30-38	54.0	9.0	49.0
C021915	HSM-Exd-PG48	PG48	37-44	59.3	10.0	52.0

Cable Glands, Explosion-proof

HSM-EXD-PG (PG Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C022001	HSM-Exd-PG7-L	PG7	3-6.5	12.5	10.0	29.0
C022002	HSM-Exd-PG9-HL	PG9	2.5-6	15.2	10.0	29.0
C022003	HSM-Exd-PG9-L	PG9	4-8	15.2	10.0	30.0
C022004	HSM-Exd-PG11-L	PG11	5-10	18.6	10.0	33.0
C022005	HSM-Exd-PG13.5-HL	PG13.5	5-10	20.4	10.0	33.0
C022006	HSM-Exd-PG13.5-L	PG13.5	6-12	20.4	10.0	34.0
C022007	HSM-Exd-PG16-HL	PG16	6-12	22.5	10.0	34.0
C022008	HSM-Exd-PG16-L	PG16	8-14	22.5	10.0	34.0
C022009	HSM-Exd-PG21-H-L	PG21	11-16	28.3	12.0	36.0
C022010	HSM-Exd-PG21-L	PG21	13-18	28.3	12.0	37.0
C022011	HSM-Exd-PG29-H-L	PG29	14-21	37.0	12.0	40.0
C022012	HSM-Exd-PG29-L	PG29	18-25	37.0	12.0	45.0


HSM-EXD-PG-L (PG with Lengthened Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C022101	HSM-Exd-G3/8	G3/8"	4-8	16.662	8.0	29.0
C022102	HSM-Exd-G1/2-H	G1/2"	5-10	20.995	8.0	31.0
C022103	HSM-Exd-G1/2	G1/2"	6-12	20.995	8.0	32.0
C022104	HSM-Exd-G1/2-D	G1/2"	8-14	20.995	8.0	32.0
C022105	HSM-Exd-G3/4-H	G3/4"	8-14	26.441	8.0	32.0
C022106	HSM-Exd-G3/4	G3/4"	13-18	26.441	8.0	34.0
C022107	HSM-Exd-G1	G1"	18-25	33.249	9.0	42.0
C022108	HSM-Exd-G1 1/4	G1 1/4"	22-32	41.91	10.0	46.0
C022109	HSM-Exd-G1 1/2	G1 1/2"	30-38	47.803	10.0	50.0
C022110	HSM-Exd-G2	G2"	37-44	59.614	11.0	52.5

HSM-EXD-NPT (NPT Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C022201	HSM-Exd-NPT3/8	NPT3/8"	4-8	17.055	11.0	33.0
C022202	HSM-Exd-NPT1/2-H	NPT1/2"	5-10	21.223	13.0	36.0
C022203	HSM-Exd-NPT1/2	NPT1/2"	6-12	21.223	13.0	37.0
C022204	HSM-Exd-NPT3/4-H	NPT3/4"	8-14	26.568	13.0	37.0
C022205	HSM-Exd-NPT3/4	NPT3/4"	13-18	26.568	13.0	39.0
C022206	HSM-Exd-NPT1	NPT1"	18-25	33.227	15.0	49.0

Cable Glands, Multicore

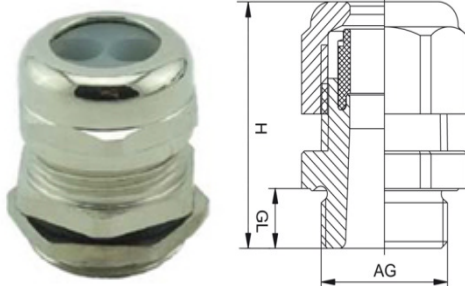

Material

■ Brass with nickel-plated

Features

■ Thread: M / PG

■ Seal: NBR (IP68 with O-Ring)

■ Temperature:

Static State: -40°C~100°C(-40°F~212°F)

Dynamic State: -20°C~80°C(-4°F~176°F)

■ Color: Silvery


HSMMC-M (Metric Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C022301	HSMMC-M16-2x3	M16x1.5	2x3	16.0	7.0	29.0
C022302	HSMMC-M18-2x3	M18x1.5	2x3	18.0	7.0	29.0
C022303	HSMMC-M18-4x3	M18x1.5	4x3	20.0	7.0	29.0
C022304	HSMMC-M20-2x5	M20x1.5	2x5	20.0	7.0	30.0
C022305	HSMMC-M20-3x4	M20x1.5	3x4	20.0	7.0	30.0
C022306	HSMMC-M20-3x3	M20x1.5	3x3	20.0	7.0	30.0
C022307	HSMMC-M20-6x3	M20x1.5	6x3	20.0	7.0	30.0
C022308	HSMMC-M25-2x8	M25x1.5	2x8	25.0	7.0	33.0
C022309	HSMMC-M25-3x7	M25x1.5	3x7	25.0	7.0	33.0
C022310	HSMMC-M25-4x6	M25x1.5	4x6	25.0	7.0	33.0
C022311	HSMMC-M32-4x9	M32x1.5	4x9	32.0	8.0	41.0
C022312	HSMMC-M32-6x7	M32x1.5	6x7	32.0	8.0	41.0
C022313	HSMMC-M40-5x9	M40x1.5	5x9	40.0	8.0	48.0

HSMMC-PG (PG Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C022401	HSMMC-PG9-2x3	PG9	2x3	15.2	7.0	29.0
C022402	HSMMC-PG11-2x3	PG11	2x3	18.6	7.0	29.0
C022403	HSMMC-PG11-3x3.5	PG11	3x3.5	18.6	7.0	29.0
C022404	HSMMC-PG13.5-6x3	PG13.5	6x3	20.4	7.0	30.0
C022405	HSMMC-PG13.5-3x4	PG13.5	3x4	20.4	7.0	30.0
C022406	HSMMC-PG16-3x4	PG16	3x4	22.4	7.0	30.0
C022407	HSMMC-PG16-5x4	PG16	5x4	22.5	7.0	30.0
C022408	HSMMC-PG21B-2x8	PG21	2x8	28.3	7.0	33.0
C022409	HSMMC-PG21B-3x7	PG21	3x7	28.3	7.0	33.0
C022410	HSMMC-PG21B-4x6	PG21	4x6	28.3	7.0	33.0

Cable Glands, TJ

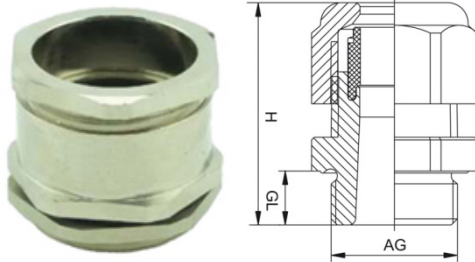

Material

- Brass with nickel-plated

Features

- Thread: M / PG
- Seal: NBR (IP68 with O-Ring)
- Temperature: -40°C~100°C(-40°F~212°F)
- Color: Silvery


HSTJ-M (Metric Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C022501	HSTJ-M12	M12x1.5	6-8	12.0	6.0	22.0
C022502	HSTJ-M14	M14x1.5	5-7	14.0	7.0	24.0
C022503	HSTJ-M16	M16x1.5	8-10	16.0	7.0	24.0
C022504	HSTJ-M18	M18x1.5	10-12	18.0	7.0	25.0
C022505	HSTJ-M20	M20x1.5	12-14	20.0	7.0	27.0
C022506	HSTJ-M22	M22x1.5	12-14	22.0	7.0	34.0
C022507	HSTJ-M25	M25x1.5	14-18	25.0	7.0	41.0
C022508	HSTJ-M27	M27x2.0	14-18	27.0	7.0	41.0
C022509	HSTJ-M32	M32x1.5	17-23	32.0	8.0	41.0
C022510	HSTJ-M36	M36x2.0	22-27	36.0	8.0	43.5
C022511	HSTJ-M40	M40x1.5	26-33	40.0	9.0	45.0
C022512	HSTJ-M50	M50x1.5	32-41	50.0	9.0	47.0

HSTJ-PG (PG Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C022601	HSTJ-PG7	PG7	6-8	12.5	6.0	22.0
C022602	HSTJ-PG9	PG9	8-10	15.2	7.0	24.0
C022603	HSTJ-PG 11	PG11	10-12	18.6	7.0	24.0
C022604	HSTJ-PG13.5	PG13.5	12-14	20.4	7.0	24.0

Cable Glands, Clamp

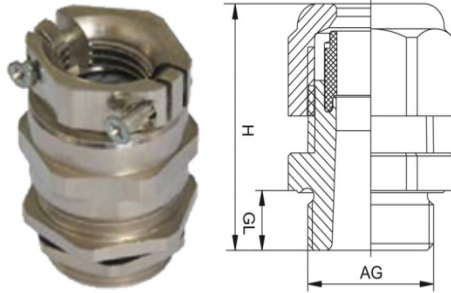

Material

■ Brass with nickel-plated

Features

■ Thread: M / PG

■ Seal: NBR (IP68 with O-Ring)

■ Temperature:

Static State: -40°C~100°C(-40°F~212°F)

Dynamic State: -20°C~80°C(-4°F~176°F)

■ Color: Silvery

HSMP-M (Metric Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C022701	HSMP-M12	M12x1.5	3-6.5	12.0	7.0	32.0
C022702	HSMP-M16	M16x1.5	4-8	16.0	7.0	35.0
C022703	HSMP-M18	M18x1.5	5-10	18.0	7.0	37.0
C022704	HSMP-M20	M20x1.5	6-12	20.0	7.0	37.0
C022705	HSMP-M24	M24x1.5	8-14	24.0	7.0	38.0
C022706	HSMP-M25	M25x1.5	10-16	25.0	7.0	38.0
C022707	HSMP-M27	M27x2.0	13-18	27.0	7.0	42.0
C022708	HSMP-M30	M30x2.0	13-18	30.0	7.0	42.0
C022709	HSMP-M32	M32x1.5	15-22	32.0	7.0	42.0
C022710	HSMP-M36	M36x2.0	18-25	36.0	7.0	51.0
C022711	HSMP-M40	M40x1.5	21-30	40.0	8.0	52.0
C022712	HSMP-M50	M50x1.5	30-38	50.0	8.0	59.0
C022713	HSMP-M63	M63x1.5	37-44	63.0	8.0	60.0

HSMP-PG (PG Thread)

Part No.	Item	Thread	Cable Φ mm	Thread Outer Φ AG mm	Length of Thread GL mm	Total Length H mm
C022801	HSMP-PG7	PG7	3-6.5	12.5	6.0	32.0
C022802	HSMP-PG9	PG9	4-8	15.2	7.0	35.0
C022803	HSMP-PG11	PG11	5-10	18.6	7.0	36.0
C022804	HSMP-PG13.5	PG13.5	6-12	20.4	7.0	38.0
C022805	HSMP-PG16	PG16	8-14	22.5	7.0	38.0
C022806	HSMP-PG21	PG21	13-18	28.3	7.0	42.0
C022807	HSMP-PG29	PG29	18-25	37.0	8.0	48.0
C022808	HSMP-PG36	PG36	22-32	47.0	8.0	52.0
C022809	HSMP-PG42	PG42	30-48	54.0	8.0	59.0