




B2

ADSS Optical Fiber Cable Accessories (All Dielectric Self-Supporting)

Seceri

A MEMBER OF
KingGo

Dead-End Guy-Grip

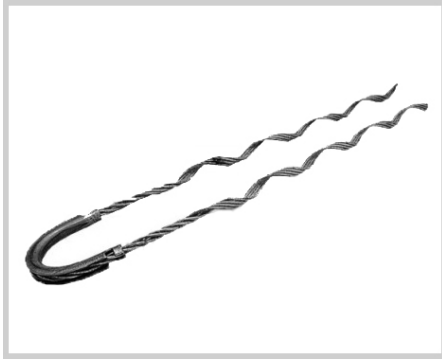

Features

- Tension force is from 1 to 10 kN
- For supporting of overhead power transmission lines, street lighting, land transport, elements of buildings and constructions.

Part No.	Item	Cable Diameter mm	Reinforced rod	Power Spiral mm	Tension kN
B020101	DN-1	9.5 - 20.9	No	300	3-5
B020102	DN-2	9.5 - 20.9	No	600	6-10
B020103	DN-3	9.5 - 20.9	No	1010	9-15

Dead-End Guy-Grip



Features

- Tension force is from 6 to 60 kN
- For supporting of overhead power transmission lines, street lighting, land transport, elements of buildings and constructions.

Part No.	Item	Cable Diameter mm	Reinforced Rod	Power Spiral mm	Protector mm	Tension kN
B020104	DNR-1	9.5 - 20.9	Yes	810	1015	6-17
B020105	DNR-2	9.5 - 20.9	Yes	920	1200	15 - 25
B020106	DNR-3	9.5 - 20.9	Yes	1600	2200	30 - 50
B020107	DNR-4	9.5 - 20.9	Yes	2100	2900	50 - 70
B020108	DNR-5	9.5 - 20.9	Yes	2100	2900	70 - 100

Suspension clamps



Features

- For ADSS, up to 50 meters.
- Supporting of overhead power transmission lines, street lighting, land transport, elements of buildings and constructions.

Part No.	Item	Lenght of Cable Span m	Cable Diameter mm	Reinforced Rod	L mm
B020201	SG-1	< 50	12.9 / 14.1	No	500

Suspension clamps



Features

- for ADSS, up to 110 meters.
- Supporting of overhead power transmission lines, street lighting, land transport, elements of buildings and constructions.

Part No.	Item	Lenght of Cable Span m	Cable Diameter mm	Reinforced Rod	Power Spiral mm	Protector mm
B020202	SGR-1	50 - 110	9.5 - 20.9	Yes	800	1200

Suspension clamps Thimble "Boat"




Features

- For ADSS and OPGW, from 110 to 800 meters.
- Supporting of overhead power transmission lines, street lighting, land transport, elements of buildings and constructions.

Part No.	Item	Lenght of Cable Span m	Cable Diameter mm	Reinforced Rod	Power Spiral mm	Protector mm
B020203	SGR-2	110	9.5 - 20.9	Yes	800	1200
B020204	SGR-3	500	9.5 - 20.9	Yes	1300	1800
B020205	SGR-4	800	9.5 - 20.9	Yes	1200	1600
B020206	SGR-5	800	9.5 - 20.9	Yes	1200	2000

Suspension clamps SGR thimble "TK-x"

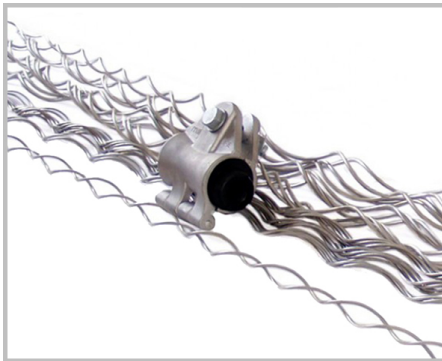

Features

- For ADSS and OPWG, from 500 to 800 meters.
- Supporting of overhead power transmission lines, street lighting, land transport, elements of buildings and constructions.

Part No.	Item	Lenght of Cable Span m	Cable Diameter mm	Type thimble	Protector mm
B020207	SGR-6	500	9.5 - 20.9	TK-7	2200
B020208	SGR-7	800	9.5 - 20.9	TK-10	1600
B020209	SGR-8	800	9.5 - 20.9	TK-10	2100

Vibration Damper




Features

- Vibration dampers are used to absorb aeolian vibration of conductor, ground wire and OPGW on over-head transmission lines.

Part No.	Item	L mm	D mm	YY / ZZ mm	Weight kg
B020301	VD-0.8-300-9-20/29	300	9	20 / 29	0.8
B020302	VD-0.8-350-11-15/20	350	11	15 / 20	1.6
B020303	VD-0.8-400-9-15/20	400	9	15 / 20	2.4

Distributuion Grip

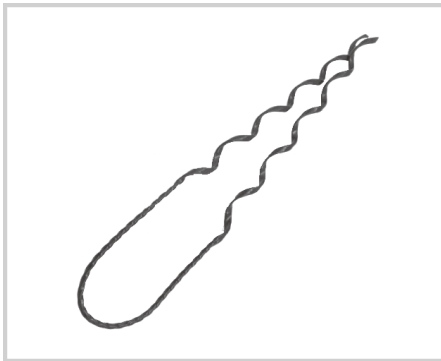

Features

- Used with covered conductors for tying the conductors to the insulators.
- Easy to install without tools.
- The tie is installed on the insulation of the covered conductor.
- One set includes 6 pcs ties.
- Size is easy to be recognized by the colour code.

Part No.	Item	Cable Diameter mm ²	L mm	R mm	Tension kN	Mark color
B020401	DG 35 / 50.2	35 - 50	470-510	45	5	Yellow
B020402	DG 70 / 95.2	70 - 95	480-575	45	5	Green
B020403	DG 120 / 150.2	120 - 150	545-602	45	5	Black

Brackets

Features:

■ For the suspension elements of cable fittings on poles.

Material:

■ Hot-dip galvanized steel



YKP-1



YKP-2



YKN-1

Part No.	Item	MBL kN	Weight kg
B020501	YKP-1	0.5	0.38
B020502	YKP-2	4.0	0.60
B020503	YKN-1	10.0	0.48

Turnbuckle



Part No.	Item	MBL kN	Weight kg
B020601	DIN 1480 M8 Hook-Eye	3.6	0.09
B020602	DIN 1480 M10 Hook-Eye	5.3	0.17
B020603	DIN 1480 M12 Hook-Eye	7.0	0.31
B020604	DIN 1480 M14 Hook-Eye	10.0	0.61
B020605	DIN 1480 M16 Hook-Eye	13.0	0.75
B020606	T-30-01	30.0	1.03