


C4

Tubing Accessories

POTALO 

A MEMBER OF
KingGo

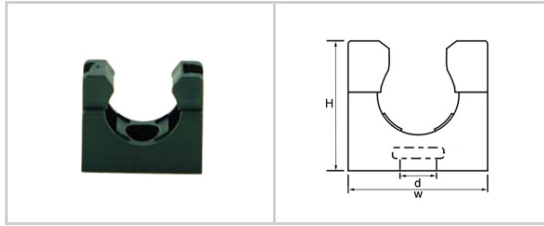

Tubing Clamps without Cap


Tubing holder with through hole for fastening by screws. Ribbed fixing for strain relief.

Material: Plastic-PA

Color: Black and Grey

Temperature: -40°C ~ +105°C

Part No.	Item Black	Item Grey	Applicable Tubing Outer Φ	W mm	H mm	Φ d mm
C070101	C-AD10.0B	C-AD10.0G	AD10.0	25	23	3.5
C070102	C-AD13.0B	C-AD13.0G	AD13.0	29	27	4.0
C070103	C-AD15.8B	C-AD15.8G	AD15.8	30	27	4.0
C070104	C-AD18.5B	C-AD18.5G	AD18.5	32	29	5.0
C070105	C-AD21.2B	C-AD21.2G	AD21.2	35	34	5.5
C070106	C-AD25.5B	C-AD25.5G	AD25.5	38	38	6.5
C070107	C-AD28.5B	C-AD28.5G	AD28.5	42	42	6.5
C070108	C-AD34.5B	C-AD34.5G	AD34.5	51	48	6.5
C070109	C-AD42.5B	C-AD42.5G	AD42.5	61	56	6.5
C070110	C-AD54.5B	C-AD54.5G	AD54.5	73	69	6.5

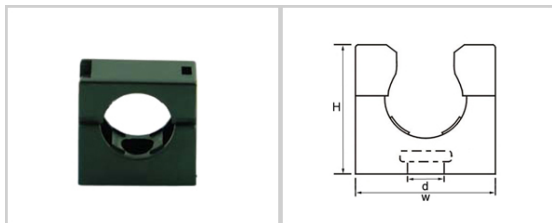

Tubing Clamps with Cap


Tubing holder with through hole for fastening by screws. Ribbed fixing for strain relief.

Material: Plastic-PA

Color: Black and Grey

Temperature: -40°C ~ +105°C

Part No.	Item Black	Item Grey	Applicable Tubing Outer Φ	W mm	H mm	Φ d mm
C070201	M-AD10.0B	M-AD10.0B	AD10.0	25	23	3.5
C070202	M-AD13.0B	M-AD13.0B	AD13.0	29	27	4.0
C070203	M-AD15.8B	M-AD15.8B	AD15.8	30	27	4.0
C070204	M-AD18.5B	M-AD18.5B	AD18.5	32	29	5.0
C070205	M-AD21.2B	M-AD21.2B	AD21.2	35	34	5.5
C070206	M-AD25.5B	M-AD25.5B	AD25.5	38	38	6.5
C070207	M-AD28.5B	M-AD28.5B	AD28.5	42	42	6.5
C070208	M-AD34.5B	M-AD34.5B	AD34.5	51	48	6.5
C070209	M-AD42.5B	M-AD42.5B	AD42.5	61	56	6.5
C070210	M-AD54.5B	M-AD54.5B	AD54.5	73	69	6.5

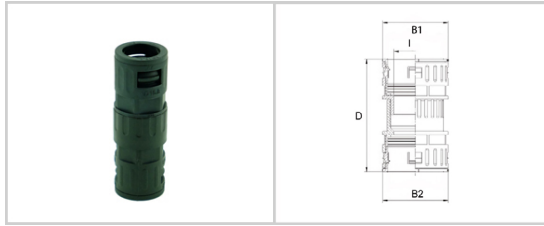


Plastic Tubing Couplings IP68

For rational tubing assembly, assembled by just putting on.

Material: Plastic-PA
Color: Black and Grey
Temperature: -40°C ~ +110°C

Part No.	Item Black	Item Grey	Applicable Tubing Outer Φ	B1 mm	B2 mm	Φl mm	D mm
C070301	K-PA-AD10.0B	K-PA-AD10.0G	AD10.0	17.0	17.0	7.0	59.0
C070302	K-PA-AD13.0B	K-PA-AD13.0G	AD13.0	20.0	20.0	10.0	63.0
C070303	K-PA-AD15.8B	K-PA-AD15.8G	AD15.8	23.0	23.0	12.0	68.5
C070304	K-PA-AD18.5B	K-PA-AD18.5G	AD18.5	26.0	26.0	14.5	72.0
C070305	K-PA-AD21.2B	K-PA-AD21.2G	AD21.2	29.5	29.5	17.0	79.0
C070306	K-PA-AD25.5B	K-PA-AD25.5G	AD25.5	34.0	34.0	20.5	82.5
C070307	K-PA-AD28.5B	K-PA-AD28.5G	AD28.5	37.0	37.0	23.5	84.0
C070308	K-PA-AD34.5B	K-PA-AD34.5G	AD34.5	44.0	44.0	30.0	92.0
C070309	K-PA-AD42.5B	K-PA-AD42.5G	AD42.5	52.5	52.5	36.5	104.0
C070310	K-PA-AD54.5B	K-PA-AD54.5G	AD54.5	64.0	64.0	48.0	107.5

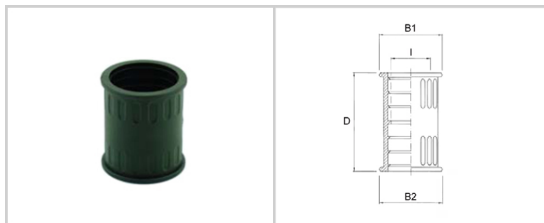


TBR Tubing Couplings IP66

For rational tubing assembly, assembled by just putting on.

Material: TBR
Color: Black and Grey
Temperature: -40°C ~ +110°C

Part No.	Item Black	Item Grey	Applicable Tubing Outer Φ	B1 mm	B2 mm	Φl mm	D mm
C070401	K-TPR-AD10.0B	K-TPR-AD10.0G	AD10.0	17.0	17.0	10.0	33.5
C070402	K-TPR-AD13.0B	K-TPR-AD13.0G	AD13.0	20.0	20.0	13.0	36.5
C070403	K-TPR-AD15.8B	K-TPR-AD15.8G	AD15.8	23.0	23.0	15.8	44.5
C070404	K-TPR-AD18.5B	K-TPR-AD18.5G	AD18.5	26.0	26.0	18.5	48.0
C070405	K-TPR-AD21.2B	K-TPR-AD21.2G	AD21.2	29.5	29.5	21.2	48.0
C070406	K-TPR-AD25.5B	K-TPR-AD25.5G	AD25.5	33.0	33.0	25.5	48.5
C070407	K-TPR-AD28.5B	K-TPR-AD28.5G	AD28.5	36.5	36.5	28.5	48.0
C070408	K-TPR-AD34.5B	K-TPR-AD34.5G	AD34.5	42.5	42.5	34.5	48.0
C070409	K-TPR-AD42.5B	K-TPR-AD42.5G	AD42.5	51.0	51.0	42.5	60.0
C070410	K-TPR-AD54.5B	K-TPR-AD54.5G	AD54.5	63.0	63.0	54.5	70.0

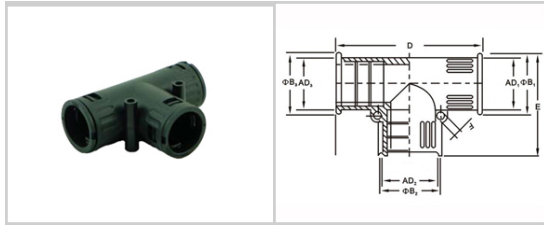

Plastic T-Distributors IP68


For rational tubing assembly, assembled by just putting on.

Material: Plastic-PA

Color: Black and Grey

Temperature: -40°C ~ +110°C

Part No.	Item Black	Item Grey	Applicable Tubing Outer Φ	ΦB2 mm	ΦB1/3 mm	D mm	E mm	ΦF mm
C070501	T-PA-AD131313B	T-PA-AD131313G	AD13.0-13.0-13.0	20	20	71.0	46.5	4.0
C070502	T-PA-AD151515B	T-PA-AD151515G	AD15.8-15.8-15.8	23	23	80.0	51.5	4.0
C070503	T-PA-AD212821B	T-PA-AD212821G	AD21.2-28.5-21.2	37	29	99.5	68.2	6.5
C070504	T-PA-AD282828B	T-PA-AD282828G	AD28.5-28.5-28.5	37	37	106.0	75.0	6.5
C070505	T-PA-AD283428B	T-PA-AD283428G	AD28.5-34.5-28.5	44	37	119.0	85.0	6.5
C070506	T-PA-AD343434B	T-PA-AD343434G	AD34.5-34.5-34.5	44	44	113.0	78.0	6.5
C070507	T-PA-AD424242B	T-PA-AD424242G	AD42.5-42.5-42.5	52	52	134.0	94.0	6.5
C070508	T-PA-AD545454B	T-PA-AD545454G	AD54.5-54.5-54.5	64	64	146.0	105.0	6.5

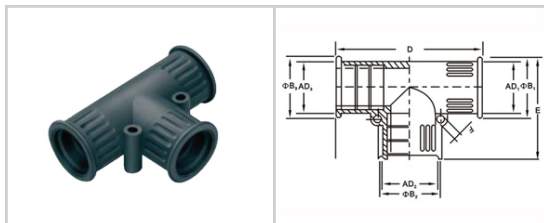

TPR T-Distributors IP66


For rational tubing assembly, assembled by just putting on.

Material: TPR

Color: Black and Grey

Temperature: -40°C ~ +110°C

Part No.	Item Black	Item Grey	Applicable Tubing Outer Φ	ΦB2 mm	ΦB1/3 mm	D mm	E mm	ΦF mm
C070601	T-TPR-AD101010B	T-TPR-AD101010B	AD10.0-10.0-10.0	17	17	40	29	3
C070602	T-TPR-AD131313B	T-TPR-AD131313B	AD13.0-13.0-13.0	20	20	43	31	3
C070603	T-TPR-AD151515B	T-TPR-AD151515B	AD15.8-15.8-15.8	23	23	50	35	3
C070604	T-TPR-AD181818B	T-TPR-AD181818B	AD18.5-18.5-18.5	26	26	55	39	3
C070605	T-TPR-AD212121B	T-TPR-AD212121B	AD21.2-21.2-21.2	29	29	60	43	3
C070606	T-TPR-AD252525B	T-TPR-AD252525B	AD25.5-25.5-25.5	33	33	70	50	3
C070607	T-TPR-AD282828B	T-TPR-AD282828B	AD28.5-28.5-28.5	36	36	80	56	4
C070608	T-TPR-AD343434B	T-TPR-AD343434B	AD34.5-34.5-34.5	42	42	96	68	4
C070609	T-TPR-AD424242B	T-TPR-AD424242B	AD42.5-42.5-42.5	51	51	117	80	4
C070610	T-TPR-AD545454B	T-TPR-AD545454B	AD54.5-54.5-54.5	63	63	137	97	4

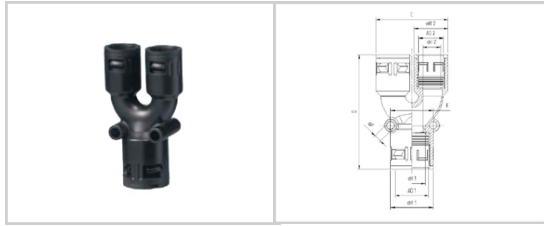

Plastic Y-Distributors IP68


For rational tubing assembly, assembled by just putting on.

Material: Plastic-PA

Color: Black and Grey

Temperature: -40°C ~ +110°C

Part No.	Item Black	Item Grey	Applicable Tubing Outer Φ	ΦB1 mm	ΦB2 mm	C mm	E mm	ΦF mm
C070701	Y-PA-AD131010B	Y-PA-AD131010G	AD13.0-10.0-10.0	20.0	17	36	19	4.0
C070702	Y-PA-AD131313B	Y-PA-AD131313G	AD13.0-13.0-13.0	20.0	20	42	20	4.0
C070703	Y-PA-AD151313B	Y-PA-AD151313G	AD15.8-13.0-13.0	23.0	20	42	22	4.0
C070704	Y-PA-AD151515B	Y-PA-AD151515G	AD15.8-15.8-15.8	23.0	23	48	22	4.0
C070705	Y-PA-AD211515B	Y-PA-AD211515G	AD21.2-15.8-15.8	29.5	23	51	27	6.5
C070706	Y-PA-AD282121B	Y-PA-AD282121G	AD28.5-21.2-21.2	37.0	29.5	62	37	6.5
C070707	Y-PA-AD342828B	Y-PA-AD342828G	AD34.5-28.5-28.5	44.0	37	77	43	6.5
C070708	Y-PA-AD423434B	Y-PA-AD423434G	AD42.5-34.5-34.5	52.0	44	98	45	6.5
C070709	Y-PA-AD544242B	Y-PA-AD544242G	AD54.5-42.5-42.5	64.0	52	110	62	6.5

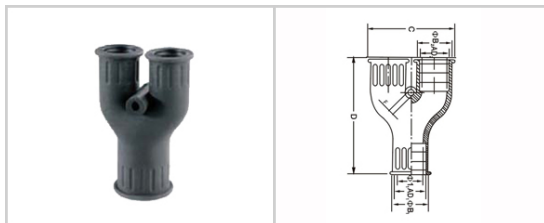

TPR Y-Distributors IP66


For rational tubing assembly, assembled by just putting on.

Material: TPR

Color: Black and Grey

Temperature: -40°C ~ +110°C

Part No.	Item Black	Item Grey	Applicable Tubing Outer Φ	ΦB1 mm	ΦB2 mm	C mm	D mm	ΦF mm
C070801	Y-TPR-AD211515B	Y-TPR-AD211515G	AD21.2-15.8-15.8	29.5	25.0	52.0	75.0	4
C070802	Y-TPR-AD212121B	Y-TPR-AD212121G	AD21.2-21.2-21.2	31.5	31.5	64.5	75.0	4
C070803	Y-TPR-AD281515B	Y-TPR-AD281515G	AD28.5-15.8-15.8	36.5	25.0	52.0	75.0	4
C070804	Y-TPR-AD282121B	Y-TPR-AD282121G	AD28.5-21.2-21.2	36.5	31.5	64.5	81.0	4
C070805	Y-TPR-AD342828B	Y-TPR-AD342828G	AD34.5-28.5-28.5	42.5	36.5	77.0	86.0	4
C070806	Y-TPR-AD423434B	Y-TPR-AD423434G	AD42.5-34.5-34.5	52.5	42.5	89.0	98.5	4

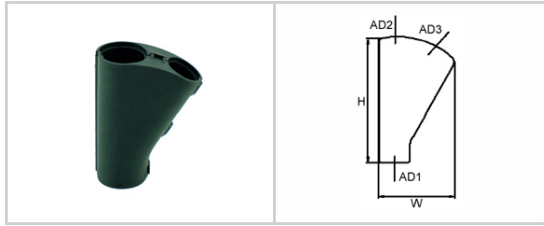

Openable V-Distributors IP40


For rational tubing assembly, assembled by just putting on.

Material: Plastic-PA

Color: Black and Grey

Temperature: -40°C ~ +110°C

Part No.	Item Black	Item Grey	Applicable Tubing Outer Φ	H mm	W mm
C070901	V-AD101010B	V-AD101010G	AD10.0-10.0-10.0	54.6	37.1
C070902	V-AD131010B	V-AD131010G	AD13.0-10.0-10.0	54.6	37.1
C070903	V-AD131310B	V-AD131310G	AD13.0-13.0-10.0	54.6	37.1
C070904	V-AD131313B	V-AD131313G	AD13.0-13.0-13.0	54.6	37.1
C070905	V-AD151310B	V-AD151310G	AD15.8-13.0-10.0	55.0	39.8
C070906	V-AD151313B	V-AD151313G	AD15.8-13.0-13.0	55.0	39.8
C070907	V-AD151510B	V-AD151510G	AD15.8-15.8-10.0	55.0	39.8
C070908	V-AD151513B	V-AD151513G	AD15.8-15.8-13.0	55.0	39.8
C070909	V-AD211010B	V-AD211010G	AD21.2-10.0-10.0	42.3	39.8
C070910	V-AD211310B	V-AD211310G	AD21.2-13.0-10.0	42.3	41.0
C070911	V-AD211313B	V-AD211313G	AD21.2-13.0-13.0	42.3	41.0
C070912	V-AD211510B	V-AD21151QG	AD21.2-15.8-10.0	48.2	39.6
C070913	V-AD211513B	V-AD211513G	AD21.2-15.8-13.0	48.2	39.6
C070914	V-AD212110B	V-AD212110G	AD21.2-21.2-10.0	57.9	44.9
C070915	V-AD212113B	V-AD212113G	AD21.2-21.2-13.0	57.9	44.9
C070916	V-AD212115B	V-AD212115G	AD21.2-21.2-15.8	63.5	47.5
C070917	V-AD282113B	V-AD282113G	AD28.5-21.2-13.0	53.5	49.0
C070918	V-AD282115B	V-AD282115G	AD28.5-21.2-15.8	53.5	49.0
C070919	V-AD282813B	V-AD282813G	AD28.5-28.5-13.0	67.0	56.5
C070920	V-AD282815B	V-AD282815G	AD28.5-28.5-15.8	67.0	56.5
C070921	V-AD282821B	V-AD282821G	AD28.5-28.5-21.2	76.5	50.0
C070922	V-AD342828B	V-AD342828G	AD34.5-28.5-28.5	88.0	68.4

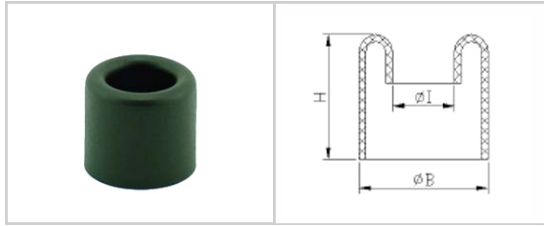

Terminal Sleeves


For cap protection, attachable on all plastic tubings.

Material: Plastic-PA

Color: Black and Grey

Temperature: -40°C ~ +110°C

Part No.	Item Black	Item Grey	Applicable Tubing Outer Φ	ΦI mm	ΦB mm	H mm
C071001	A-AD10.0B	A-AD10.0G	AD10.0	4.3	12.0	20
C071002	A-AD13.0B	A-AD13.0G	AD13.0	7.8	15.0	21
C071003	A-AD15.8B	A-AD15.8G	AD15.8	10.3	17.8	21
C071004	A-AD18.5B	A-AD18.5G	AD18.5	12.1	20.5	21
C071005	A-AD21.2B	A-AD21.2G	AD21.2	14.3	23.2	21
C071006	A-AD28.5B	A-AD28.5G	AD28.5	20.8	30.5	22
C071007	A-AD34.5B	A-AD34.5G	AD34.5	26.8	36.5	22
C071008	A-AD42.5B	A-AD42.5G	AD42.5	33.8	44.5	25
C071009	A-AD54.5B	A-AD54.5G	AD54.5	45.8	56.5	25

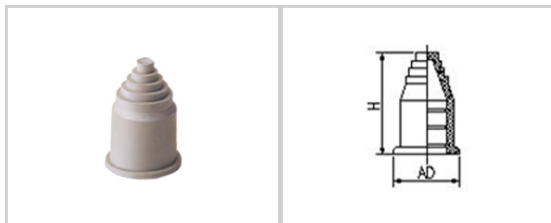

End Caps IP66

Rational tubing end, assembled by just putting on.

Material: TPE

Color: Black and Grey

Temperature: -40°C ~ +120°C

Part No.	Item Black	Item Grey	Applicable Tubing Outer Φ	Cable Diameter Φ mm	H mm
C071101	E-AD10.0B	E-AD10.0G	AD10.0	1.0-8.0	29.0
C071102	E-AD13.0B	E-AD13.0G	AD13.0	1.0-10.0	29.5
C071103	E-AD15.8B	E-AD15.8G	AD15.8	4.0-12.0	36.5
C071104	E-AD18.5B	E-AD18.5G	AD18.5	4.0-13.0	37.5
C071105	E-AD21.2B	E-AD21.2G	AD21.2	6.0-16.5	37.5
C071106	E-AD28.5B	E-AD28.5G	AD28.5	6.0-23.0	40.2
C071107	E-AD34.5B	E-AD34.5G	AD34.5	6.0-29.0	44.2
C071108	E-AD42.5B	E-AD42.5G	AD42.5	10.0-37.0	46.0
C071109	E-AD54.5B	E-AD54.5G	AD54.5	10.0-47.0	52.0



Galvanized Steel Tubing Clamps

Ribbed fixing for strain relief.

Material: Galvanized steel with rubber profile.

Temperature: -40°C ~ +120°C

Part No.	Item Black	Item Grey	Applicable Tubing Outer Φ	Width b mm	Φ d mm
C071201	SKM-AD10.0	-	AD10.0	12	4
C071202	SKM-AD13.0	-	AD13.0	12	4
C071203	SKM-AD15.8	-	AD15.8	12	4
C071204	SKM-AD18.5	-	AD18.5	12	4
C071205	SKM-AD21.2	-	AD21.2	12	4
C071206	SKM-AD25.5	-	AD25.5	12	5
C071207	SKM-AD28.5	-	AD28.5	12	5
C071208	SKM-AD34.5	-	AD34.5	12	6
C071209	SKM-AD42.5	-	AD42.5	12	6
C071210	SKM-AD54.5	-	AD54.5	12	6



Stainless Steel Tubing Clamps

Ribbed fixing for strain relief.

Material: Stainless steel with rubber profile.

Temperature: -40°C ~ +120°C

Part No.	Item Black	Item Grey	Applicable Tubing Outer Φ	Width b mm	Φ d mm
C071301	SKS-AD10.0	-	AD10.0	12	4
C071302	SKS-AD13.0	-	AD13.0	12	4
C071303	SKS-AD15.8	-	AD15.8	12	4
C071304	SKS-AD18.5	-	AD18.5	12	4
C071305	SKS-AD21.2	-	AD21.2	12	4
C071306	SKS-AD25.5	-	AD25.5	12	5
C071307	SKS-AD28.5	-	AD28.5	12	5
C071308	SKS-AD34.5	-	AD34.5	12	6
C071309	SKS-AD42.5	-	AD42.5	12	6
C071310	SKS-AD54.5	-	AD54.5	12	6



Polyamide Blind Plugs IP68

For holes seal.

Material: Plastic-PA

Color: Black and Grey

Temperature: -40°C ~ +110°C

STK-M (Metric Thread)

Part No.	Item Black	Item Grey	Thread	Thread outer Φ	Blind Plug outer Φ	Thread Length mm
C071401	STK-M12B	STK-M12B	M12 x 1.5	12	16	8
C071402	STK-M16B	STK-M16B	M16 x 1.5	16	20	8
C071403	STK-M18B	STK-M18B	M18 x 1.5	18	23	8
C071404	STK-M20B	STK-M20B	M20 x 1.5	20	25	9
C071405	STK-M22B	STK-M22B	M22 x 1.5	22	27	10
C071406	STK-M24B	STK-M24B	M24 x 1.5	24	29	10
C071407	STK-M25B	STK-M25B	M25 x 1.5	25	30	11
C071408	STK-M27B	STK-M27B	M27 x 2.0	27	33	11
C071409	STK-M30B	STK-M30B	M30 x 1.5	30	35	11
C071410	STK-M32B	STK-M32B	M32 x 1.5	32	39	11
C071411	STK-M36B	STK-M36B	M36 x 2.0	36	44	11
C071412	STK-M40B	STK-M40B	M40 x 1.5	40	46	13
C071413	STK-M48B	STK-M48B	M48 x 2.0	48	55	13
C071414	STK-M50B	STK-M50B	M50 x 1.5	50	57	15
C071415	STK-M63B	STK-M63B	M63 x 1.5	63	70	15

STK-PG (PG Thread)

Part No.	Item Black	Item Grey	Thread	Thread outer Φ	Blind Plug outer Φ	Thread Length mm
C071501	STK-PG7B	STK-PG7G	PG7	12.5	16	8
C071502	STK-PG9B	STK-PG9G	PG9	15.2	19	8
C071503	STK-PG11B	STK-PG11G	PG11	18.6	23	8
C071504	STK-PG13.5B	STK-PG13.5G	PG13.5	20.4	25	9
C071505	STK-PG16B	STK-PG16G	PG16	22.5	27	10
C071506	STK-PG21B	STK-PG21G	PG21	28.3	33	11
C071507	STK-PG29B	STK-PG29G	PG29	37.0	44	11
C071508	STK-PG36B	STK-PG36G	PG36	47.0	55	13
C071509	STK-PG42B	STK-PG42G	PG42	54.0	62	15
C071510	STK-PG48B	STK-PG48G	PG48	59.3	69	15



Circular Metal Blind Plugs, Brass IP68

For holes seal.

Material: Nickel-plated Brass.

STM-M (Metric Thread)

Part No.	Item	Thread	Thread outer Φ	Blind Plug outer Φ	Thread Length mm
C071601	STM-M10	M10 x 1.5	10	12	6
C071602	STM-M12	M12 x 1.5	12	14	6
C071603	STM-M16	M16 x 1.5	16	18	7
C071604	STM-M18	M18 x 1.5	18	21	7
C071605	STM-M20	M20 x 1.5	20	23	7
C071606	STM-M22	M22 x 1.5	22	25	7
C071607	STM-M24	M24 x 1.5	24	27	7
C071608	STM-M25	M25 x 1.5	25	28	7
C071609	STM-M27	M27 x 2.0	27	30	7
C071610	STM-M30	M30 x 1.5	30	33	7
C071611	STM-M32	M32 x 1.5	32	35	8
C071612	STM-M33	M33 x 2.0	33	36	8
C071613	STM-M36	M36 x 2.0	36	39	8
C071614	STM-M40	M40 x 1.5	40	44	9
C071615	STM-M42	M42 x 2.0	42	46	9
C071616	STM-M48	M48 x 2.0	48	52	9
C071617	STM-M50	M50 x 1.5	50	54	9
C071618	STM-M56	M56 x 2.0	56	60	9
C071619	STM-M63	M63 x 1.5	63	67	9

STM-PG (PG Thread)

Part No.	Item	Thread	Thread outer Φ	Blind Plug outer Φ	Thread Length mm
C071701	STM-PG7	PG7	12.5	14	6
C071702	STM-PG9	PG9	15.2	18	7
C071703	STM-PG11	PG11	18.6	21	7
C071704	STM-PG13.5	PG13.5	20.4	23	7
C071705	STM-PG16	PG16	22.5	25	7
C071706	STM-PG21	PG21	28.3	31	7
C071707	STM-PG29	PG29	37.0	40	8
C071708	STM-PG36	PG36	47.0	50	9
C071709	STM-PG42	PG42	54.0	57	9
C071710	STM-PG48	PG48	59.3	64	10

STM-G (G Thread)

Part No.	Item	Thread	Thread outer Φ	Blind Plug outer Φ	Thread Length mm
C071801	STM-G3/8	G3/8"	16.662	20	8
C071802	STM-G1/2	G1/2"	20.995	23	8
C071803	STM-G3/4	G3/4"	26.441	32	8
C071804	STM-G1	G1"	33.249	39	9
C071805	STM-G1 1/4	G1 1/4"	41.91	48	10
C071806	STM-G1 1/2	G1 1/2"	47.803	58	10
C071807	STM-G2	G2"	59.614	72	11

STM-NPT (NPT Thread)

Part No.	Item	Thread	Thread outer Φ	Blind Plug outer Φ	Thread Length mm
C071901	STM-NPT3/8	NPT3/8"	17.055	20	11
C071902	STM-NPT1/2	NPT1/2"	21.223	23	13
C071903	STM-NPT3/4	NPT3/4"	26.568	32	13
C071904	STM-NPT1	NPT1"	33.228	39	16
C071905	STM-NPT1 1/4	NPT1 1/4"	41.988	48	16
C071906	STM-NPT1 1/2	NPT1 1/2"	48.054	58	18
C071907	STM-NPT2	NPT2"	60.092	72	18



Circular Metal Blind Plugs, Stainless Steel IP68

For holes seal.

Material: Stainless Steel SUS304

STS-M (Metric Thread)

Part No.	Item	Thread	Thread outer Φ	Blind Plug outer Φ	Thread Length mm
C072001	STS-M10	M10 x 1.5	10	12	6
C072002	STS-M12	M12 x 1.5	12	14	6
C072003	STS-M16	M16 x 1.5	16	18	7
C072004	STS-M18	M18 x 1.5	18	21	7
C072005	STS-M20	M20 x 1.5	20	23	7
C072006	STS-M22	M22 x 1.5	22	25	7
C072007	STS-M24	M24 x 1.5	24	27	7
C072008	STS-M25	M25 x 1.5	25	28	7
C072009	STS-M27	M27 x 2.0	27	30	7
C072010	STS-M30	M30 x 1.5	30	33	7
C072011	STS-M32	M32 x 1.5	32	35	8
C072012	STS-M33	M33 x 2.0	33	36	8
C072013	STS-M36	M36 x 2.0	36	39	8
C072014	STS-M40	M40 x 1.5	40	44	9
C072015	STS-M42	M42 x 2.0	42	46	9
C072016	STS-M48	M48 x 2.0	48	52	9
C072017	STS-M50	M50 x 1.5	50	54	9
C072018	STS-M56	M56 x 2.0	56	60	9
C072019	STS-M63	M63 x 1.5	63	67	9

STS-PG (PG Thread)

Part No.	Item	Thread	Thread outer Φ	Blind Plug outer Φ	Thread Length mm
C072101	STS-PG7	PG7	12.5	14	6
C072102	STS-PG9	PG9	15.2	18	7
C072103	STS-PG11	PG11	18.6	21	7
C072104	STS-PG13.5	PG13.5	20.4	23	7
C072105	STS-PG16	PG16	22.5	25	7
C072106	STS-PG21	PG21	28.3	31	7
C072107	STS-PG29	PG29	37.0	40	8
C072108	STS-PG36	PG36	47.0	50	9
C072109	STS-PG42	PG42	54.0	57	9
C072110	STS-PG48	PG48	59.3	64	10

STS-G (G Thread)

Part No.	Item	Thread	Thread outer Φ	Blind Plug outer Φ	Thread Length mm
C072201	STS-G3/8	G3/8"	16.662	20	8
C072202	STS-G1/2	G1/2"	20.995	23	8
C072203	STS-G3/4	G3/4"	26.441	32	8
C072204	STS-G1	G1"	33.249	39	9
C072205	STS-G1 1/4	G1 1/4"	41.91	48	10
C072206	STS-G1 1/2	G1 1/2"	47.803	58	10
C072207	STS-G2	G2"	59.614	72	11

STS-NPT (NPT Thread)

Part No.	Item	Thread	Thread outer Φ	Blind Plug outer Φ	Thread Length mm
C072301	STS-NPT3/8	NPT3/8"	17.055	20	11
C072302	STS-NPT1/2	NPT1/2"	21.223	23	13
C072303	STS-NPT3/4	NPT3/4"	26.568	32	13
C072304	STS-NPT1	NPT1"	33.228	39	16
C072305	STS-NPT1 1/4	NPT1 1/4"	41.988	48	16
C072306	STS-NPT1 1/2	NPT1 1/2"	48.054	58	18
C072307	STS-NPT2	NPT2"	60.092	72	18



Hexagon Metal Blind Plugs, Brass IP68

For holes seal.

Material: Nickel-plated Brass.

STMH-M (Metric Thread)

Part No.	Item	Thread	Thread outer Φ	Height mm	Thread Length mm
C072401	STMH-M10	M10 x 1.5	10	9.0	6
C072402	STMH-M12	M12 x 1.5	12	9.0	6
C072403	STMH-M16	M16 x 1.5	16	10.0	7
C072404	STMH-M18	M18 x 1.5	18	10.5	7
C072405	STMH-M20	M20 x 1.5	20	10.5	7
C072406	STMH-M22	M22 x 1.5	22	10.5	7
C072407	STMH-M24	M24 x 1.5	24	10.5	7
C072408	STMH-M25	M25 x 1.5	25	10.5	7
C072409	STMH-M27	M27 x 2.0	27	12.0	7
C072410	STMH-M30	M30 x 1.5	30	12.0	8
C072411	STMH-M32	M32 x 1.5	32	12.0	8
C072412	STMH-M33	M33 x 2.0	33	12.0	8
C072413	STMH-M36	M36 x 2.0	36	12.0	8
C072414	STMH-M40	M40 x 1.5	40	12.0	8
C072415	STMH-M42	M42 x 2.0	42	14.0	9
C072416	STMH-M48	M48 x 2.0	48	14.0	9
C072417	STMH-M50	M50 x 1.5	50	14.0	9
C072418	STMH-M56	M56 x 2.0	56	15.0	9
C072419	STMH-M63	M63 x 1.5	63	16.0	10

STMH-PG (PG Thread)

Part No.	Item	Thread	Thread outer Φ	Height mm	Thread Length mm
C072501	STMH-PG7	PG7	12.5	9.0	6
C072502	STMH-PG9	PG9	15.2	10.0	7
C072503	STMH-PG11	PG11	18.6	10.5	7
C072504	STMH-PG13.5	PG13.5	20.4	10.5	7
C072505	STMH-PG16	PG16	22.5	10.5	7
C072506	STMH-PG21	PG21	28.3	11.0	7
C072507	STMH-PG29	PG29	37.0	12.0	8
C072508	STMH-PG36	PG36	47.0	14.0	9
C072509	STMH-PG42	PG42	54.0	14.0	9
C072510	STMH-PG48	PG48	59.3	16.0	10

STMH-G (G Thread)

Part No.	Item	Thread	Thread outer Φ	Height mm	Thread Length mm
C072601	STMH-G3/8	G3/8"	16.662	11.5	8
C072602	STMH-G1/2	G1/2"	20.995	11.5	8
C072603	STMH-G3/4	G3/4"	26.441	12.0	8
C072604	STMH-G1	G1"	33.249	13.0	9
C072605	STMH-G1 1/4	G1 1/4"	41.910	15.0	10
C072606	STMH-G1 1/2	G1 1/2"	47.803	15.0	10
C072607	STMH-G2	G2"	59.614	17.0	11

STMH-NPT (NPT Thread)

Part No.	Item	Thread	Thread outer Φ	Height mm	Thread Length mm
C072701	STMH-NPT3/8	NPT3/8"	17.055	14.5	11
C072702	STMH-NPT1/2	NPT1/2"	21.223	16.5	13
C072703	STMH-NPT3/4	NPT3/4"	26.568	17.0	13
C072704	STMH-NPT1	NPT1"	33.228	20.0	16
C072705	STMH-NPT1 1/4	NPT1 1/4"	41.988	21.0	16
C072706	STMH-NPT1 1/2	NPT1 1/2"	48.054	23.0	18
C072707	STMH-NPT2	NPT2"	60.092	24.0	18



Hexagon Metal Blind Plugs, Stainless Steel IP68

For holes seal.

Material: Stainless Steel SUS304

STSH-M (Metric Thread)

Part No.	Item	Thread	Thread outer Φ	Blind Plug outer Φ	Thread Length mm
C072801	STSH-M10	M10 x 1.5	10	12	6
C072802	STSH-M12	M12 x 1.5	12	14	6
C072803	STSH-M16	M16 x 1.5	16	18	7
C072804	STSH-M18	M18 x 1.5	18	21	7
C072805	STSH-M20	M20 x 1.5	20	23	7
C072806	STSH-M22	M22 x 1.5	22	25	7
C072807	STSH-M24	M24 x 1.5	24	27	7
C072808	STSH-M25	M25 x 1.5	25	28	7
C072809	STSH-M27	M27 x 2.0	27	30	7
C072810	STSH-M30	M30 x 1.5	30	33	7
C072811	STSH-M32	M32 x 1.5	32	35	8
C072812	STSH-M33	M33 x 2.0	33	36	8
C072813	STSH-M36	M36 x 2.0	36	39	8
C072814	STSH-M40	M40 x 1.5	40	44	9
C072815	STSH-M42	M42 x 2.0	42	46	9
C072816	STSH-M48	M48 x 2.0	48	52	9
C072817	STSH-M50	M50 x 1.5	50	54	9
C072818	STSH-M56	M56 x 2.0	56	60	9
C072819	STSH-M63	M63 x 1.5	63	67	9

STSH-PG (PG Thread)

Part No.	Item	Thread	Thread outer Φ	Blind Plug outer Φ	Thread Length mm
C072901	STSH-PG7	PG7	12.5	14	6
C072902	STSH-PG9	PG9	15.2	18	7
C072903	STSH-PG11	PG11	18.6	21	7
C072904	STSH-PG13.5	PG13.5	20.4	23	7
C072905	STSH-PG16	PG16	22.5	25	7
C072906	STSH-PG21	PG21	28.3	31	7
C072907	STSH-PG29	PG29	37.0	40	8
C072908	STSH-PG36	PG36	47.0	50	9
C072909	STSH-PG42	PG42	54.0	57	9
C072910	STSH-PG48	PG48	59.3	64	10

STSH-G (G Thread)

Part No.	Item	Thread	Thread outer Φ	Height mm	Thread Length mm
C073001	STSH-G3/8	G3/8"	16.662	11.5	8
C073002	STSH-G1/2	G1/2"	20.995	11.5	8
C073003	STSH-G3/4	G3/4"	26.441	12.0	8
C073004	STSH-G1	G1"	33.249	13.0	9
C073005	STSH-G1 1/4	G1 1/4"	41.91	15.0	10
C073006	STSH-G1 1/2	G1 1/2"	47.803	15.0	10
C073007	STSH-G2	G2"	59.614	17.0	11

STSH-NPT (NPT Thread)

Part No.	Item	Thread	Thread outer Φ	Height mm	Thread Length mm
C073101	STSH-NPT3/8	NPT3/8"	17.055	14.5	11
C073102	STSH-NPT1/2	NPT1/2"	21.223	16.5	13
C073103	STSH-NPT3/4	NPT3/4"	26.568	17.0	13
C073104	STSH-NPT1	NPT1"	33.228	20.0	16
C073105	STSH-NPT1 1/4	NPT1 1/4"	41.988	21.0	16
C073106	STSH-NPT1 1/2	NPT1 1/2"	48.054	23.0	18
C073107	STSH-NPT2	NPT2"	60.092	24.0	18



**Explosion-proof Circular Metal Blind Plugs,
Brass IP68**

For holes seal.

Material: Nickel-plated Brass.

Ex-mark: EXD II T5

STM-EXD-M (Metric Thread)

Part No.	Item	Thread	Thread outer Φ	Blind Plug outer Φ	Height mm	Thread Length mm
C073201	STM-Exd-M10	M10 x 1.5	10	12	15	12
C073202	STM-Exd-M12	M12 x 1.5	12	14	18	15
C073203	STM-Exd-M16	M16 x 1.5	16	18	18	15
C073204	STM-Exd-M18	M18 x 1.5	18	21	18	15
C073205	STM-Exd-M20	M20 x 1.5	20	23	18	15
C073206	STM-Exd-M22	M22 x 1.5	22	25	19	16
C073207	STM-Exd-M24	M24 x 1.5	24	27	19	16
C073208	STM-Exd-M25	M25 x 1.5	25	28	19	16
C073209	STM-Exd-M27	M27 x 2.0	27	30	23	20
C073210	STM-Exd-M30	M30 x 1.5	30	33	23	20
C073211	STM-Exd-M32	M32 x 1.5	32	35	24	20
C073212	STM-Exd-M33	M33 x 2.0	33	36	24	20
C073213	STM-Exd-M36	M36 x 2.0	36	39	24	20
C073214	STM-Exd-M40	M40 x 1.5	40	44	26	20
C073215	STM-Exd-M42	M42 x 2.0	42	46	26	20
C073216	STM-Exd-M48	M48 x 2.0	48	52	27	21
C073217	STM-Exd-M50	M50 x 1.5	50	54	28	21
C073218	STM-Exd-M56	M56 x 2.0	56	60	28	21
C073219	STM-Exd-M63	M63 x 1.5	63	67	28	21

STM-EXD-PG (PG Thread)

Part No.	Item	Thread	Thread outer Φ	Blind Plug outer Φ	Height mm	Thread Length mm
C073301	STM-Exd-PG7	PG7	12.5	14	15.0	12
C073302	STM-Exd-PG9	PG9	15.2	18	15.0	12
C073303	STM-Exd-PG11	PG11	18.6	21	15.5	12
C073304	STM-Exd-PG13.5	PG13.5	20.4	23	15.5	12
C073305	STM-Exd-PG16	PG16	22.5	25	15.5	12
C073306	STM-Exd-PG21	PG21	28.3	31	17.0	13
C073307	STM-Exd-PG29	PG29	37.0	40	17.5	13
C073308	STM-Exd-PG36	PG36	47.0	50	18.5	13
C073309	STM-Exd-PG42	PG42	54.0	57	20.0	15
C073310	STM-Exd-PG48	PG48	59.3	64	21.0	15

STM-EXD-G (G Thread)

Part No.	Item	Thread	Thread outer Φ	Blind Plug outer Φ	Height mm	Thread Length mm
C073401	STM-Exd-G3/8	G3/8"	16.662	20	15.5	12
C073402	STM-Exd-G1/2	G1/2"	20.995	23	18.5	15
C073403	STM-Exd-G3/4	G3/4"	26.441	32	18.5	15
C073404	STM-Exd-G1	G1"	33.249	39	25.0	21
C073405	STM-Exd-G1 1/4	G1 1/4"	41.91	48	25.5	21
C073406	STM-Exd-G1 1/2	G1 1/2"	47.803	58	26.0	21
C073407	STM-Exd-G2	G2"	59.614	72	27.5	22

STM-EXD-NPT (NPT Thread)

Part No.	Item	Thread	Thread outer Φ	Blind Plug outer Φ	Height mm	Thread Length mm
C073501	STM-Exd-NPT3/8	NPT3/8"	17.055	20	15.5	12
C073502	STM-Exd-NPT1/2	NPT1/2"	21.223	23	18.5	15
C073503	STM-Exd-NPT3/4	NPT3/4"	26.568	32	19.0	20
C073504	STM-Exd-NPT1	NPT1"	33.228	39	24.0	20
C073505	STM-Exd-NPT1 1/4	NPT1 1/4"	41.988	48	24.5	20
C073506	STM-Exd-NPT1 1/2	NPT1 1/2"	48.054	58	25.0	20
C073507	STM-Exd-NPT2	NPT2"	60.092	72	25.5	20



**Explosion-proof Circular Metal Blind Plugs,
Stainless Steel IP68**

For holes seal.

Material: Stainless Steel SUS304

Ex-mark: EXD II T5

STS-EXD-M (Metric Thread)

Part No.	Item	Thread	Thread outer Φ mm	Blind Plug outer Φ mm	Height mm	Thread Length mm
C073601	STS-Exd-M10	M10 x 1.5	10	12	15	12
C073602	STS-Exd-M12	M12 x 1.5	12	14	18	15
C073603	STS-Exd-M16	M16 x 1.5	16	18	18	15
C073604	STS-Exd-M18	M18 x 1.5	18	21	18	15
C073605	STS-Exd-M20	M20 x 1.5	20	23	18	15
C073606	STS-Exd-M22	M22 x 1.5	22	25	19	16
C073607	STS-Exd-M24	M24 x 1.5	24	27	19	16
C073608	STS-Exd-M25	M25 x 1.5	25	28	19	16
C073609	STS-Exd-M27	M27 x 2.0	27	30	23	20
C073610	STS-Exd-M30	M30 x 1.5	30	33	23	20
C073611	STS-Exd-M32	M32 x 1.5	32	35	24	20
C073612	STS-Exd-M33	M33 x 2.0	33	36	24	20
C073613	STS-Exd-M36	M36 x 2.0	36	39	24	20
C073614	STS-Exd-M40	M40 x 1.5	40	44	26	20
C073615	STS-Exd-M42	M42 x 2.0	42	46	26	20
C073616	STS-Exd-M48	M48 x 2.0	48	52	27	21
C073617	STS-Exd-M50	M50 x 1.5	50	54	28	21
C073618	STS-Exd-M56	M56 x 2.0	56	60	28	21
C073619	STS-Exd-M63	M63 x 1.5	63	67	28	21

STS-EXD-PG (PG Thread)

Part No.	Item	Thread	Thread outer Φ mm	Blind Plug outer Φ mm	Height mm	Thread Length mm
C073701	STS-Exd-PG7	PG7	12.5	14	15.0	12
C073702	STS-Exd-PG9	PG9	15.2	18	15.0	12
C073703	STS-Exd-PG11	PG11	18.6	21	15.5	12
C073704	STS-Exd-PG13.5	PG13.5	20.4	23	15.5	12
C073705	STS-Exd-PG16	PG16	22.5	25	15.5	12
C073706	STS-Exd-PG21	PG21	28.3	31	17.0	13
C073707	STS-Exd-PG29	PG29	37.0	40	17.5	13
C073708	STS-Exd-PG36	PG36	47.0	50	18.5	13
C073709	STS-Exd-PG42	PG42	54.0	57	20.0	15
C073710	STS-Exd-PG48	PG48	59.3	64	21.0	15

STS-EXD-G (G Thread)

Part No.	Item	Thread	Thread outer Φ mm	Blind Plug outer Φ mm	Height mm	Thread Length mm
C073801	STS-Exd-G3/8	G3/8"	16.662	20	15.5	12
C073802	STS-Exd-G1/2	G1/2"	20.995	23	18.5	15
C073803	STS-Exd-G3/4	G3/4"	26.441	32	18.5	15
C073804	STS-Exd-G1	G1"	33.249	39	25.0	21
C073805	STS-Exd-G1 1/4	G1 1/4"	41.91	48	25.5	21
C073806	STS-Exd-G1 1/2	G1 1/2"	47.803	58	26.0	21
C073807	STS-Exd-G2	G2"	59.614	72	27.5	22

STS-EXD-NPT (NPT Thread)

Part No.	Item	Thread	Thread outer Φ mm	Blind Plug outer Φ mm	Height mm	Thread Length mm
C073901	STS-Exd-NPT3/8	NPT3/8"	17.055	20	15.5	12
C073902	STS-Exd-NPT1/2	NPT1/2"	21.223	23	18.5	15
C073903	STS-Exd-NPT3/4	NPT3/4"	26.568	32	19.0	20
C073904	STS-Exd-NPT1	NPT1"	33.228	39	24.0	20
C073905	STS-Exd-NPT1 1/4	NPT1 1/4"	41.988	48	24.5	20
C073906	STS-Exd-NPT1 1/2	NPT1 1/2"	48.054	58	25.0	20
C073907	STS-Exd-NPT2	NPT2"	60.092	72	25.5	20



**Explosion-proof Hexagon Metal Blind
Plugs, Brass IP68**

For holes seal.

Material: Nickel-plated Brass.

Ex-mark: EXD II T5

STMH-EXD-M (Metric Thread)

Part No.	Item	Thread	Thread outer Φ mm	Height mm	Thread Length mm
C074001	STMH-Exd-M10	M10 x 1.5	10	15	12
C074002	STMH-Exd-M12	M12 x 1.5	12	18	15
C074003	STMH-Exd-M16	M16 x 1.5	16	18	15
C074004	STMH-Exd-M18	M18 x 1.5	18	18	15
C074005	STMH-Exd-M20	M20 x 1.5	20	18	15
C074006	STMH-Exd-M22	M22 x 1.5	22	19	16
C074007	STMH-Exd-M24	M24 x 1.5	24	19	16
C074008	STMH-Exd-M25	M25 x 1.5	25	19	16
C074009	STMH-Exd-M27	M27 x 2.0	27	23	20
C074010	STMH-Exd-M30	M30 x 1.5	30	23	20
C074011	STMH-Exd-M32	M32 x 1.5	32	24	20
C074012	STMH-Exd-M33	M33 x 2.0	33	24	20
C074013	STMH-Exd-M36	M36 x 2.0	36	24	20
C074014	STMH-Exd-M40	M40 x 1.5	40	26	20
C074015	STMH-Exd-M42	M42 x 2.0	42	26	20
C074016	STMH-Exd-M48	M48 x 2.0	48	27	21
C074017	STMH-Exd-M50	M50 x 1.5	50	28	21
C074018	STMH-Exd-M56	M56 x 2.0	56	28	21
C074019	STMH-Exd-M63	M63 x 1.5	63	28	21

STMH-EXD-PG (PG Thread)

Part No.	Item	Thread	Thread outer Φ mm	Height mm	Thread Length mm
C074020	STMH-Exd-PG7	PG7	12.5	15.0	12
C074021	STMH-Exd-PG9	PG9	15.2	15.0	12
C074022	STMH-Exd-PG11	PG11	18.6	15.5	12
C074023	STMH-Exd-PG13.5	PG13.5	20.4	15.5	12
C074024	STMH-Exd-PG16	PG16	22.5	15.5	12
C074025	STMH-Exd-PG21	PG21	28.3	17.0	13
C074026	STMH-Exd-PG29	PG29	37.0	17.5	13
C074027	STMH-Exd-PG36	PG36	47.0	18.5	13
C074028	STMH-Exd-PG42	PG42	54.0	20.0	15
C074029	STMH-Exd-PG48	PG48	59.3	21.0	15

STMH-EXD-G (G Thread)

Part No.	Item	Thread	Thread outer Φ mm	Height mm	Thread Length mm
C074030	STMH-Exd-G3/8	G3/8"	16.662	15.5	12
C074031	STMH-Exd-G1/2	G1/2"	20.995	18.5	15
C074032	STMH-Exd-G3/4	G3/4"	26.441	18.5	15
C074033	STMH-Exd-G1	G1"	33.249	25.0	21
C074034	STMH-Exd-G1 1/4	G1 1/4"	41.91	25.5	21
C074035	STMH-Exd-G1 1/2	G1 1/2"	47.803	26.0	21
C074036	STMH-Exd-G2	G2"	59.614	27.5	22

STMH-EXD-NPT (NPT Thread)

Part No.	Item	Thread	Thread outer Φ mm	Height mm	Thread Length mm
C074037	STMH-Exd-NPT3/8	NPT3/8"	17.055	15.5	12
C074038	STMH-Exd-NPT1/2	NPT1/2"	21.223	18.5	15
C074039	STMH-Exd-NPT3/4	NPT3/4"	26.568	19.0	20
C074040	STMH-Exd-NPT1	NPT1"	33.228	24.0	20
C074041	STMH-Exd-NPT1 1/4	NPT1 1/4"	41.988	24.5	20
C074042	STMH-Exd-NPT1 1/2	NPT1 1/2"	48.054	25.0	20
C074043	STMH-Exd-NPT2	NPT2"	60.092	25.5	20



**Explosion-proof Hexagon Metal Blind
Plugs, Stainless Steel IP68**

For holes seal.

Material: Stainless Steel SUS304

Ex-mark: EXD II T5

STSH-EXD-M (Metric Thread)

Part No.	Item	Thread	Thread outer Φ mm	Height mm	Thread Length mm
C074101	STSH-Exd-M10	M10 x 1.5	10	15	12
C074102	STSH-Exd-M12	M12 x 1.5	12	18	15
C074103	STSH-Exd-M16	M16 x 1.5	16	18	15
C074104	STSH-Exd-M18	M18 x 1.5	18	18	15
C074105	STSH-Exd-M20	M20 x 1.5	20	18	15
C074106	STSH-Exd-M22	M22 x 1.5	22	19	16
C074107	STSH-Exd-M24	M24 x 1.5	24	19	16
C074108	STSH-Exd-M25	M25 x 1.5	25	19	16
C074109	STSH-Exd-M27	M27 x 2.0	27	23	20
C074110	STSH-Exd-M30	M30 x 1.5	30	23	20
C074111	STSH-Exd-M32	M32 x 1.5	32	24	20
C074112	STSH-Exd-M33	M33 x 2.0	33	24	20
C074113	STSH-Exd-M36	M36 x 2.0	36	24	20
C074114	STSH-Exd-M40	M40 x 1.5	40	26	20
C074115	STSH-Exd-M42	M42 x 2.0	42	26	20
C074116	STSH-Exd-M48	M48 x 2.0	48	27	21
C074117	STSH-Exd-M50	M50 x 1.5	50	28	21
C074118	STSH-Exd-M56	M56 x 2.0	56	28	21
C074119	STSH-Exd-M63	M63 x 1.5	63	28	21

STSH-EXD-PG (PG Thread)

Part No.	Item	Thread	Thread outer Φ mm	Height mm	Thread Length mm
C074120	STSH-Exd-PG7	PG7	12.5	15.0	12
C074121	STSH-Exd-PG9	PG9	15.2	15.0	12
C074122	STSH-Exd-PG11	PG11	18.6	15.5	12
C074123	STSH-Exd-PG13.5	PG13.5	20.4	15.5	12
C074124	STSH-Exd-PG16	PG16	22.5	15.5	12
C074125	STSH-Exd-PG21	PG21	28.3	17.0	13
C074126	STSH-Exd-PG29	PG29	37.0	17.5	13
C074127	STSH-Exd-PG36	PG36	47.0	18.5	13
C074128	STSH-Exd-PG42	PG42	54.0	20.0	15
C074129	STSH-Exd-PG48	PG48	59.3	21.0	15

**Explosion-proof Hexagon Metal Blind
Plugs, Stainless Steel IP68**

STSH-EXD-G (G Thread)

Part No.	Item	Thread	Thread outer Φ mm	Height mm	Thread Length mm
C074130	STSH-Exd-G3/8	G3/8"	16.662	15.5	12
C074131	STSH-Exd-G1/2	G1/2"	20.995	18.5	15
C074132	STSH-Exd-G3/4	G3/4"	26.441	18.5	15
C074133	STSH-Exd-G1	G1"	33.249	25.0	21
C074134	STSH-Exd-G1 1/4	G1 1/4"	41.910	25.5	21
C074135	STSH-Exd-G1 1/2	G1 1/2"	47.803	26.0	21
C074136	STSH-Exd-G2	G2"	59.614	27.5	22

STSH-EXD-NPT (NPT Thread)

Part No.	Item	Thread	Thread outer Φ mm	Height mm	Thread Length mm
C074137	STSH-Exd-NPT3/8	NPT3/8"	17.055	15.5	12
C074138	STSH-Exd-NPT1/2	NPT1/2"	21.223	18.5	15
C074139	STSH-Exd-NPT3/4	NPT3/4"	26.568	19.0	20
C074140	STSH-Exd-NPT1	NPT1"	33.228	24.0	20
C074141	STSH-Exd-NPT1 1/4	NPT1 1/4"	41.988	24.5	20
C074142	STSH-Exd-NPT1 1/2	NPT1 1/2"	48.054	25.0	20
C074143	STSH-Exd-NPT2	NPT2"	60.092	25.5	20



Rubber Grommets

For holes of 0.5-4mm thickness, quick and simple.

Material: EPDM

Color: Black, Grey, White

Temperature: -40°C ~ +110°C

RG

Part No.	Item Black	Item Grey	Item White	Holes Φ mm	Thickness mm
C074301	RG-12B	RG-12G	RG-12W	12	0.5-2.0
C074302	RG-13B	RG-13G	RG-13W	13	0.5-2.0
C074303	RG-16B	RG-16G	RG-16W	16	1.0-4.0
C074304	RG-20B	RG-20G	RG-20W	20	1.0-4.0
C074305	RG-23B	RG-23G	RG-23W	23	1.0-4.0
C074306	RG-25B	RG-25G	RG-25W	25	1.0-4.0
C074307	RG-29B	RG-29G	RG-29W	29	1.0-4.0
C074308	RG-32B	RG-32G	RG-32W	32	1.0-4.0
C074309	RG-38B	RG-38G	RG-38W	38	1.0-4.0
C074310	RG-40B	RG-40G	RG-40W	40	1.0-4.0
C074311	RG-48B	RG-48G	RG-48W	48	1.0-4.0
C074312	RG-50B	RG-50G	RG-50W	50	1.0-4.0



Coupling Sleeves

For fitting sleeves.


Material: Nickel-plated Brass.

VBM-PG (PG Thread)

Part No.	Item	Thread	Length mm
C074201	VBM-M10	M10 x 1.5	16
C074202	VBM-M12	M12 x 1.5	16
C074203	VBM-M16	M16 x 1.5	18
C074204	VBM-M20	M20 x 1.5	22
C074205	VBM-M24	M24 x 1.5	22
C074206	VBM-M25	M25 x 1.5	22
C074207	VBM-M27	M27 x 2.0	22
C074208	VBM-M32	M32 x 1.5	24
C074209	VBM-M40	M40 x 1.5	30
C074210	VBM-M48	M48 x 2.0	35
C074211	VBM-M50	M50 x 1.5	35
C074212	VBM-M63	M63 x 1.5	42

VBM-PG (PG Thread)

Part No.	Item	Thread	Length mm
C074213	VBM-PG7	PG7	15
C074214	VBM-PG9	PG9	15
C074215	VBM-PG11	PG11	18
C074216	VBM-PG13.5	PG13.5	22
C074217	VBM-PG16	PG16	22
C074218	VBM-PG21	PG21	24
C074219	VBM-PG29	PG29	30
C074220	VBM-PG36	PG36	35
C074221	VBM-PG48	PG48	42



Polyamide Reducers

For fitting sleeves.

Material: Plastic-PA

Color: Black and Grey

Temperature: -40°C ~ +110°C

REK-M (Metric Thread)

Part No.	Item Black	Item Grey	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C074401	REK-M16/M12B	REK-M16/M12G	M16 x 1.5	M12 x 1.5	8	12
C074402	REK-M20/M16B	REK-M20/M16G	M20 x 1.5	M16 x 1.5	9	13
C074403	REK-M25/M16B	REK-M25/M16G	M25 x 1.5	M16 x 1.5	11	16
C074404	REK-M25/M18B	REK-M25/M18G	M25 x 1.5	M18 x 1.5	11	16
C074405	REK-M25/M20B	REK-M25/M20G	M25 x 1.5	M20 x 1.5	11	16
C074406	REK-M32/M20B	REK-M32/M20G	M32 x 1.5	M20 x 1.5	11	16
C074407	REK-M32/M24B	REK-M32/M24G	M32 x 1.5	M24 x 1.5	11	16
C074408	REK-M32/M25B	REK-M32/M25G	M32 x 1.5	M25 x 1.5	11	16
C074409	REK-M32/M27B	REK-M32/M27G	M32 x 1.5	M27 x 2.0	11	16
C074410	REK-M40/M25B	REK-M40/M25G	M40 x 1.5	M25 x 1.5	13	19
C074411	REK-M40/M30B	REK-M40/M30G	M40 x 1.5	M30 x 2.0	13	19
C074412	REK-M40/M32B	REK-M40/M32G	M40 x 1.5	M32 x 1.5	13	19
C074413	REK-M50/M32B	REK-M50/M32G	M50 x 1.5	M32 x 1.5	14	22
C074414	REK-M50/M40B	REK-M50/M40G	M50 x 1.5	M40 x 1.5	14	22
C074415	REK-M63/M40B	REK-M63/M40G	M63 x 1.5	M40 x 1.5	15	24
C074416	REK-M63/M50B	REK-M63/M50G	M63 x 1.5	M50 x 1.5	15	24

REK-PG (PG Thread)

Part No.	Item Black	Item Grey	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C074417	REK-PG9/PG7B	REK-PG9/PG7G	PG9	PG7	8	20.5
C074418	REK-PG11/PG9B	REK-PG11/PG9G	PG11	PG9	8	22.5
C074419	REK-PG13.5/PG11B	REK-PG13.5/PG11G	PG13.5	PG11	9	24.0
C074420	REK-PG16/PG11B	REK-PG16/PG11G	PG16	PG11	10	16.0
C074421	REK-PG16/PG13.5B	REK-PG16/PG13.5G	PG16	PG13.5	10	16.0
C074422	REK-PG21/PG16B	REK-PG21/PG16G	PG21	PG16	11	16.0
C074423	REK-PG29/PG21B	REK-PG29/PG21G	PG29	PG21	12	18.0
C074424	REK-PG36/PG29B	REK-PG36/PG29G	PG36	PG29	13	24.0
C074425	REK-PG48/PG42 B	REK-PG48/PG42G	PG48	PG42	14	24.0



Metal Reducers, Brass

For fitting sleeves.

Material: Nickel-plated brass.

Temperature: -40°C ~ +110°C

REM-M (Metric Thread)

Part No.	Item	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C074501	REM-M16/M12	M16 x 1.5	M12 x 1.5	7	10.0
C074502	REM-M18/M16	M18 x 1.5	M16 x 1.5	7	20.5
C074503	REM-M20/M16	M20 x 1.5	M16 x 1.5	7	10.5
C074504	REM-M20/M18	M20 x 1.5	M18 x 1.5	7	21.0
C074505	REM-M24/M20	M24 x 1.5	M20 x 1.5	7	10.5
C074506	REM-M25/M20	M25 x 1.5	M20 x 1.5	7	10.5
C074507	REM-M27/M25	M27 x 2.0	M25 x 1.5	8	24.0
C074508	REM-M30/M27	M30 x 2.0	M27 x 1.5	8	24.0
C074509	REM-M32/M25	M32 x 1.5	M25 x 2.0	8	12.0
C074510	REM-M36/M32	M36 x 2.0	M32 x 1.5	8	12.0
C074511	REM-M40/M32	M40 x 1.5	M32 x 1.5	9	14.0
C074512	REM-M50/M40	M50 x 1.5	M40 x 1.5	9	14.0
C074513	REM-M63/M50	M63 x 1.5	M50 x 1.5	10	16.0

REM-PG (PG Thread)

Part No.	Item	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C074514	REM-PG9/PG7	PG9	PG7	7	10.0
C074515	REM-PG11/PG9	PG11	PG9	7	10.5
C074516	REM-PG13.5/PG11	PG13.5	PG11	7	10.5
C074517	REM-PG16/PG13.5	PG16	PG13.5	7	10.5
C074518	REM-PG21/PG16	PG21	PG16	7	11.0
C074519	REM-PG29/PG21	PG29	PG21	8	13.0
C074520	REM-PG36/PG29	PG36	PG29	9	14.0
C074521	REM-PG48/PG42	PG48	PG42	10	16.0



Metal Reducers, Stainless Steel

For fitting sleeves.

Material: Stainless Steel SUS304.

Temperature: -40°C ~ +110°C

RES-M (Metric Thread)

Part No.	Item	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C074601	RES-M16/M12	M16 x 1.5	M12 x 1.5	7	10.0
C074602	RES-M18/M16	M18 x 1.5	M16 x 1.5	7	20.5
C074603	RES-M20/M16	M20 x 1.5	M16 x 1.5	7	10.5
C074604	RES-M20/M18	M20 x 1.5	M18 x 1.5	7	21.0
C074605	RES-M24/M20	M24 x 1.5	M20 x 1.5	7	10.5
C074606	RES-M25/M20	M25 x 1.5	M20 x 1.5	7	10.5
C074607	RES-M27/M25	M27 x 2.0	M25 x 1.5	8	24.0
C074608	RES-M30/M27	M30 x 2.0	M27 x 1.5	8	24.0
C074609	RES-M32/M25	M32 x 1.5	M25 x 2.0	8	12.0
C074610	RES-M36/M32	M36 x 2.0	M32 x 1.5	8	12.0
C074611	RES-M40/M32	M40 x 1.5	M32 x 1.5	9	14.0
C074612	RES-M50/M40	M50 x 1.5	M40 x 1.5	9	14.0
C074613	RES-M63/M50	M63 x 1.5	M50 x 1.5	10	16.0

RES-PG (PG Thread)

Part No.	Item	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C074614	RES-PG9/PG7	PG9	PG7	7	10.0
C074615	RES-PG11/PG9	PG11	PG9	7	10.5
C074616	RES-PG13.5/PG11	PG13.5	PG11	7	10.5
C074617	RES-PG16/PG13.5	PG16	PG13.5	7	10.5
C074618	RES-PG21/PG16	PG21	PG16	7	11.0
C074619	RES-PG29/PG21	PG29	PG21	8	13.0
C074620	RES-PG36/PG29	PG36	PG29	9	14.0
C074621	RES-PG48/PG42	PG48	PG42	10	16.0



Explosion-proof Metal Reducers, Brass

For fitting sleeves.

Material: Nickel-plated brass.

Temperature: -40°C ~ +110°C

Ex-mark: EXD II T5

REM-M (Metric Thread)

Part No.	Item	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C074701	REM-Exd-M16/M12	M16 x 1.5	M12 x 1.5	15	19
C074702	REM-Exd-M18/M16	M18 x 1.5	M16 x 1.5	15	19
C074703	REM-Exd-M20/M16	M20 x 1.5	M16 x 1.5	15	19
C074704	REM-Exd-M20/M18	M20 x 1.5	M18 x 1.5	15	19
C074705	REM-Exd-M24/M20	M24 x 1.5	M20 x 1.5	15	19
C074706	REM-Exd-M25/M20	M25 x 1.5	M20 x 1.5	15	19
C074707	REM-Exd-M27/M25	M27 x 2.0	M25 x 1.5	15	19
C074708	REM-Exd-M30/M27	M30 x 2.0	M27 x 1.5	15	19
C074709	REM-Exd-M32/M25	M32 x 1.5	M25 x 2.0	15	20
C074710	REM-Exd-M36/M32	M36 x 2.0	M32 x 1.5	15	20
C074711	REM-Exd-M40/M32	M40 x 1.5	M32 x 1.5	15	20
C074712	REM-Exd-M50/M40	M50 x 1.5	M40 x 1.5	15	20
C074713	REM-Exd-M63/M50	M63 x 1.5	M50 x 1.5	20	26

REM-PG (PG Thread)

Part No.	Item	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C074714	REM-Exd-PG9/PG7	PG9	PG7	15	19.0
C074715	REM-Exd-PG11/PG9	PG11	PG9	15	19.0
C074716	REM-Exd-PG13.5/PG11	PG13.5	PG11	15	19.0
C074717	REM-Exd-PG16/PG13.5	PG16	PG13.5	15	19.5
C074718	REM-Exd-PG21/PG16	PG21	PG16	15	19.5
C074719	REM-Exd-PG29/PG21	PG29	PG21	15	20.0
C074720	REM-Exd-PG36/PG29	PG36	PG29	20	25.0
C074721	REM-Exd-PG48/PG42	PG48	PG42	20	26.0



Polyamide Enlargements

For fitting sleeves.

Material: Plastic-PA

Color: Black and Grey

Temperature: -40°C ~ +110°C

EWK-M (Metric Thread)

Part No.	Item Black	Item Grey	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C074801	EWK-M12/M16B	EWK-M12/M16G	M12 x 1.5	M16 x 1.5	8	22
C074802	EWK-M16/M20B	EWK-M16/M20G	M16 x 1.5	M20 x 1.5	8	23
C074803	EWK-M20/M25B	EWK-M20/M25G	M20 x 1.5	M25 x 1.5	9	27
C074804	EWK-M25/M32B	EWK-M25/M32G	M25 x 1.5	M32 x 1.5	11	30
C074805	EWK-M32/M40B	EWK-M32/M40G	M32 x 1.5	M40 x 1.5	11	34
C074806	EWK-M40/M50B	EWK-M40/M50G	M40 x 1.5	M50 x 1.5	13	37
C074807	EWK-M50/M63B	EWK-M50/M63G	M50 x 1.5	M63 x 1.5	14	41

EWK-PG (PG Thread)

Part No.	Item Black	Item Grey	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C074808	EWK-PG7/PG9B	EWK-PG7/PG9G	PG7	PG9	8	20
C074809	EWK-PG9/PG11B	EWK-PG9/PG11G	PG9	PG11	8	23
C074810	EWK-PG11/PG13.5B	EWK-PG11/PG13.5G	PG11	PG13.5	8	23
C074811	EWK-PG13.5/PG16B	EWK-PG13.5/PG16G	PG13.5	PG16	8	23
C074812	EWK-PG16/PG21B	EWK-PG16/PG21G	PG16	PG21	10	29
C074813	EWK-PG21/PG29B	EWK-PG21/PG29G	PG21	PG29	11	32
C074814	EWK-PG29/PG36B	EWK-PG29/PG36G	PG29	PG36	11	35
C074815	EWK-PG36/PG42B	EWK-PG36/PG42G	PG36	PG42	13	41
C074816	EWK-PG42/PG48B	EWK-PG42/PG48G	PG42	PG48	15	46



Metal Enlargements, Brass

For fitting sleeves.

Material: Nickel-plated Brass.
Temperature: -40°C ~ +110°C

EWM-M (Metric Thread)

Part No.	Item	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C074901	EWM-M12/M16	M12 x 1.5	M16 x 1.5	6	16.0
C074902	EWM-M16/M18	M16 x 1.5	M18 x 1.5	7	17.5
C074903	EWM-M16/M20	M16 x 1.5	M20 x 1.5	7	18.5
C074904	EWM-M18/M20	M18 x 1.5	M20 x 1.5	7	18.5
C074905	EWM-M20/M25	M20 x 1.5	M25 x 1.5	7	18.0
C074906	EWM-M25/M30	M25 x 1.5	M30 x 2.0	7	19.5
C074907	EWM-M25/M32	M25 x 1.5	M32 x 1.5	7	20.0
C074908	EWM-M30/M36	M30 x 2.0	M36 x 2.0	8	23.5
C074909	EWM-M32/M40	M32 x 1.5	M40 x 1.5	8	23.5
C074910	EWM-M36/M48	M36 x 2.0	M48 x 2.0	8	27.0
C074911	EWM-M40/M50	M40 x 1.5	M50 x 1.5	9	28.0
C074912	EWM-M50/M63	M50 x 1.5	M63 x 1.5	10	30.5

EWM-PG (PG Thread)

Part No.	Item	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C074913	EWM-PG7/PG9	PG7	PG9	6	16
C074914	EWM-PG9/PG11	PG9	PG11	7	18
C074915	EWM-PG9/PG13.5	PG9	PG13.5	7	18
C074916	EWM-PG11/PG13.5	PG11	PG13.5	7	18
C074917	EWM-PG11/PG16	PG11	PG16	7	20
C074918	EWM-PG11/PG21	PG11	PG21	7	22
C074919	EWM-PG13.5/PG16	PG13.5	PG16	7	20
C074920	EWM-PG13.5/PG21	PG13.5	PG21	7	22
C074921	EWM-PG16/PG21	PG16	PG21	7	22
C074922	EWM-PG16/PG29	PG16	PG29	7	23
C074923	EWM-PG21/PG29	PG21	PG29	7	23
C074924	EWM-PG29/PG36	PG29	PG36	8	27
C074925	EWM-PG36/PG42	PG36	PG42	9	31
C074926	EWM-PG42/PG48	PG42	PG48	10	33



Metal Enlargements, Stainless Steel

For fitting sleeves.

Material: Stainless Steel SUS304

Temperature: -40°C ~ +110°C

EWS-M (Metric Thread)

Part No.	Item	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C075001	EWS-M12/M16	M12 x 1.5	M16 x 1.5	6	16.0
C075002	EWS-M16/M18	M16 x 1.5	M18 x 1.5	7	17.5
C075003	EWS-M16/M20	M16 x 1.5	M20 x 1.5	7	18.5
C075004	EWS-M18/M20	M18 x 1.5	M20 x 1.5	7	18.5
C075005	EWS-M20/M25	M20 x 1.5	M25 x 1.5	7	18.0
C075006	EWS-M25/M30	M25 x 1.5	M30 x 2.0	7	19.5
C075007	EWS-M25/M32	M25 x 1.5	M32 x 1.5	7	20.0
C075008	EWS-M30/M36	M30 x 2.0	M36 x 2.0	8	23.5
C075009	EWS-M32/M40	M32 x 1.5	M40 x 1.5	8	23.5
C075010	EWS-M36/M48	M36 x 2.0	M48 x 2.0	8	27.0
C075011	EWS-M40/M50	M40 x 1.5	M50 x 1.5	9	28.0
C075012	EWS-M50/M63	M50 x 1.5	M63 x 1.5	10	30.5

EWS-PG (PG Thread)

Part No.	Item	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C075013	EWS-PG7/PG9	PG7	PG9	6	16
C075014	EWS-PG9/PG11	PG9	PG11	7	18
C075015	EWS-PG9/PG13.5	PG9	PG13.5	7	18
C075016	EWS-PG11/PG13.5	PG11	PG13.5	7	18
C075017	EWS-PG11/PG16	PG11	PG16	7	20
C075018	EWS-PG11/PG21	PG11	PG21	7	22
C075019	EWS-PG13.5/PG16	PG13.5	PG16	7	20
C075020	EWS-PG13.5/PG21	PG13.5	PG21	7	22
C075021	EWS-PG16/PG21	PG16	PG21	7	22
C075022	EWS-PG16/PG29	PG16	PG29	7	23
C075023	EWS-PG21/PG29	PG21	PG29	7	23
C075024	EWS-PG29/PG36	PG29	PG36	8	27
C075025	EWS-PG36/PG42	PG36	PG42	9	31
C075026	EWS-PG42/PG48	PG42	PG48	10	33



Explosion-proof Metal Enlargements, Brass

For fitting sleeves.


Material: Nickel-plated Brass.
Temperature: -40°C ~ +110°C
Ex-mark: EXD II T5

EWM-M (Metric Thread)

Part No.	Item	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C075101	EWM-Exd-M12/M16	M12 x 1.5	M16 x 1.5	15	33
C075102	EWM-Exd-M16/M18	M16 x 1.5	M18 x 1.5	15	33
C075103	EWM-Exd-M16/M20	M16 x 1.5	M20 x 1.5	15	33
C075104	EWM-Exd-M18/M20	M18 x 1.5	M20 x 1.5	15	33
C075105	EWM-Exd-M20/M25	M20 x 1.5	M25 x 1.5	15	33
C075106	EWM-Exd-M25/M30	M25 x 1.5	M30 x 2.0	15	33
C075107	EWM-Exd-M25/M32	M25 x 1.5	M32 x 1.5	15	33
C075108	EWM-Exd-M30/M36	M30 x 2.0	M36 x 2.0	15	33
C075109	EWM-Exd-M32/M40	M32 x 1.5	M40 x 1.5	15	33
C075110	EWM-Exd-M36/M48	M36 x 2.0	M48 x 2.0	15	33
C075111	EWM-Exd-M40/M50	M40 x 1.5	M50 x 1.5	15	33
C075112	EWM-Exd-M50/M63	M50 x 1.5	M63 x 1.5	15	39

EWM-PG (PG Thread)

Part No.	Item	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C075113	EWM-Exd-PG7/PG9	PG7	PG9	15	33
C075114	EWM-Exd-PG9/PG11	PG9	PG11	15	33
C075115	EWM-Exd-PG9/PG13.5	PG9	PG13.5	15	33
C075116	EWM-Exd-PG11/PG13.5	PG11	PG13.5	15	33
C075117	EWM-Exd-PG11/PG16	PG11	PG16	15	33
C075118	EWM-Exd-PG11/PG21	PG11	PG21	15	33
C075119	EWM-Exd-PG13.5/PG16	PG13.5	PG16	15	33
C075120	EWM-Exd-PG13.5/PG21	PG13.5	PG21	15	33
C075121	EWM-Exd-PG16/PG21	PG16	PG21	15	33
C075122	EWM-Exd-PG16/PG29	PG16	PG29	15	33
C075123	EWM-Exd-PG21/PG29	PG21	PG29	15	33
C075124	EWM-Exd-PG29/PG36	PG29	PG36	15	33
C075125	EWM-Exd-PG36/PG42	PG36	PG42	15	38
C075126	EWM-Exd-PG42/PG48	PG42	PG48	15	44

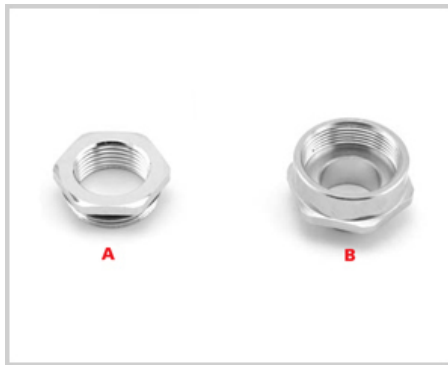

Metal Adaptors, Brass

For fitting sleeves.

Material: Nickel-plated Brass.
Temperature: -40°C ~ +110°C

ADM-M (Metric Thread)

Part No.	Item	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C075201	ADM-M16/PG7	M16 x 1.5	PG7	7	10.0
C075202	ADM-M16/PG9	M16 x 1.5	PG9	7	20.5
C075203	ADM-M16/PG11	M16 x 1.5	PG11	7	20.5
C075204	ADM-M18/PG9	M18 x 1.5	PG9	7	20.5
C075205	ADM-M18/PG11	M18 x 1.5	PG11	7	20.5
C075206	ADM-M18/PG13.5	M18 x 1.5	PG13.5	7	20.5
C075207	ADM-M20/PG11	M20 x 1.5	PG11	7	20.5
C075208	ADM-M20/PG13.5	M20 x 1.5	PG13.5	7	21.0
C075209	ADM-M20/PG16	M20 x 1.5	PG16	7	23.0
C075210	ADM-M25/PG16	M25 x 1.5	PG16	7	12.0
C075211	ADM-M25/PG21	M25 x 1.5	PG21	7	12.0
C075212	ADM-M27/PG13.5	M27 x 2.0	PG13.5	8	12.0
C075213	ADM-M27/PG16	M27 x 1.5	PG16	8	12.0
C075214	ADM-M32/PG21	M32 x 1.5	PG21	8	12.0
C075215	ADM-M32/PG29	M32 x 1.5	PG29	8	12.0

ADM-PG (PG Thread)

Part No.	Item	Outer Thread	Inner Thread	Outer Thread Length mm	Length mm
C075216	ADM-PG9/M16	PG9	M16 x 1.5	7	20.5
C075217	ADM-PG9/M20	PG9	M20 x 1.5	7	20.5
C075218	ADM-PG11/M20	PG11	M20 x 1.5	7	20.5
C075219	ADM-PG13.5/M20	PG13.5	M20 x 1.5	7	20.5
C075220	ADM-PG16/M20	PG16	M20 x 1.5	7	20.5
C075221	ADM-PG16/M25	PG16	M25 x 1.5	7	22.5
C075222	ADM-PG21/M25	PG21	M25 x 1.5	7	23.0
C075223	ADM-PG21/M32	PG21	M32 x 1.5	7	23.0
C075224	ADM-PG21/M40	PG21	M40 x 1.5	7	26.0
C075225	ADM-PG29/M40	PG29	M40 x 1.5	8	27.0
C075226	ADM-PG36/M50	PG36	M50 x 1.5	9	28.0
C075227	ADM-PG42/M63	PG42	M63 x 1.5	9	29.0